

EMPower 2/3 Smooth and 1/3 Ribbed Scratch Resistant Chrome Gas Griddle Top 24 " (AGA)

ITEM # _____
 MODEL # _____
 NAME # _____
 SIS # _____
 AIA # _____



169222 (ARG24FRCE)

EMPower Range Griddle,
 gas, 24" wide, 2/3 smooth
 and 1/3 ribbed Scratch
 Resistant NitroChrome3
 surface with with 4"
 adjustable, removable legs)
 - AGA - Australia

Short Form Specification

Item No.

Unit to be Electrolux EMPower 2/3 Smooth and 1/3 Ribbed Scratch Resistant Chromium Gas Griddle Top with three individually controlled high efficiency 26,000 BTU (7,6 kW) burners. Suitable for natural gas or propane gas. Thick 1" (25 mm) highly polished griddle plate maintains selected temperatures and assures quick recovery. Stainless steel grease trough, one piece rolled front. Two large 1 gal. (3.8 lt) removable grease collector drawers. Insulated cooktop to conserve energy. Front, side and top panels of unit in Stainless steel with Scotch Brite finish. Unit has right-angled side edges to allow flush-fitting junction between units.

In North America, products are covered by Electrolux Platinum Star® Service Program two-year parts and one-year labor warranty, installation start-up and performance check-up after one year from installation.

Main Features

- In compliance with ETL Certification (UL & NSF).
- Thick 25 mm (1") griddle plate maintains selected temperatures and assures quick recovery.
- Three individually controlled high efficiency 7,6 kW burners.
- Stainless steel grease trough, one piece rolled front.
- Two large 3.8 lt removable grease collector drawers.
- Insulated cooktop to conserve energy.
- Flame failure device to protect against accidental extinguishing of the flame.
- All major compartments located in front of unit for ease of maintenance.
- Front, side and rear panels in Stainless Steel with Scotch Brite finish.
- Right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- Kit for installation of top units to neutral bases and cupboards provided as standard.
- Included accessories: propane converter kit, pressure regulator.
- Scratch resistant cooking surface thanks to a special treatment of the chromium plate.
- Easy to clean and corrosion resistant chromium surface.

Construction

- 4 screws to install on the cupboard base are supplied with the unit.
- Gas pressure regulator is supplied with the unit.
- Cooking surface in scratch resistant chromium-plated steel with non-stick finishing for optimum grilling results.
- Cooking surface 25mm thick coated steel for optimum grilling results and ease of use.

Included Accessories

- 1 of Scraper for smooth plate fry tops PNC 164255
- 1 of Scraper for ribbed plate fry tops PNC 206420
 - kit includes knife blades for both smooth and ribbed surface

Optional Accessories

- Scraper for smooth plate fry tops PNC 164255 ☐
- 4 pins to fix Top to refrigerated/Open Base PNC 169048 ☐
- Backshelf to wall installation 24" Units PNC 169098 ☐
- Portioning shelf 12" PNC 169173 ☐
- Portioning shelf 16" PNC 169174 ☐
- Portioning shelf 24" PNC 169175 ☐

APPROVAL: _____



Electrolux
PROFESSIONAL

EMPower
2/3 Smooth and 1/3 Ribbed Scratch Resistant
Chrome Gas Griddle Top 24" (AGA)


- Scraper for ribbed plate fry tops - kit includes knife blades for both smooth and ribbed surface
- PNC 206420
□




EMPower
2/3 Smooth and 1/3 Ribbed Scratch Resistant Chrome Gas Griddle Top
24" (AGA)
The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2020.10.22

Front

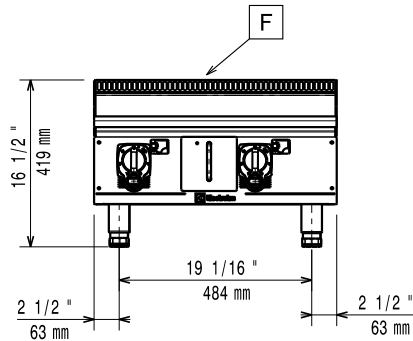


Side

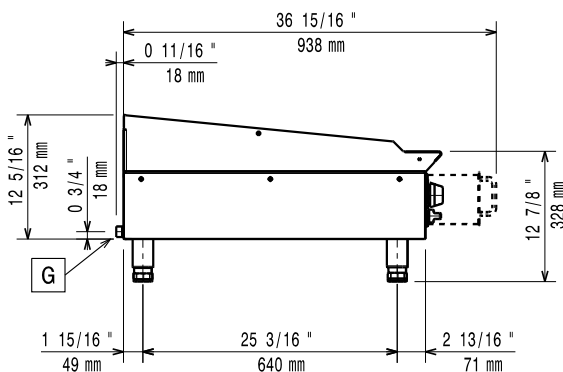

EQ = Equipotential screw
 G = Gas connection

Top

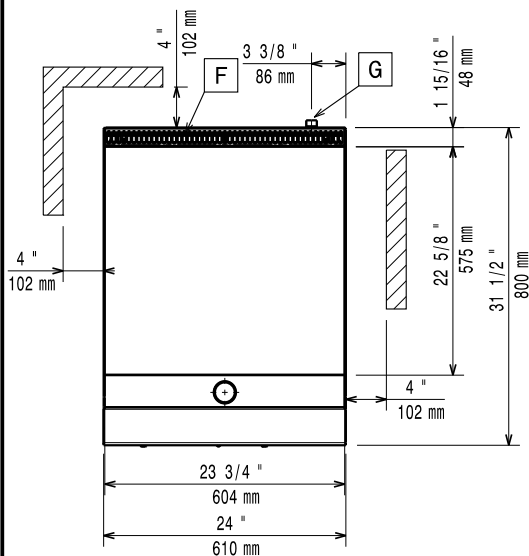

Gas

Gas Power:	
169222 (ARG24FRCEN)	52000 Btu/hr (15.2 kW)
Gas Type Option:	Propane
Gas Inlet:	3/4"

Key Information:

External dimensions, Width:	24 1/32" (610 mm)
External dimensions, Depth:	31 1/2" (800 mm)
External dimensions, Height:	16 1/2" (419 mm)
Net weight:	159 lbs (72 kg)
Shipping width:	35 7/16" (900 mm)
Shipping depth:	26" (660 mm)
Shipping height:	25 1/2" (648 mm)
Shipping weight:	176 lbs (80 kg)
Shipping volume:	13.59 ft ³ (0.38 m ³)

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.