
Two Door Glass Chiller, Remote

Range: BackBar
SKOPE ID: GC402
Dimensions: 1585 mm (W) × 590 mm (D) × 870 mm (H)*
Capacity: 290 L

* Height with legs is adjustable from 855 to 890.

Project:

Item #:

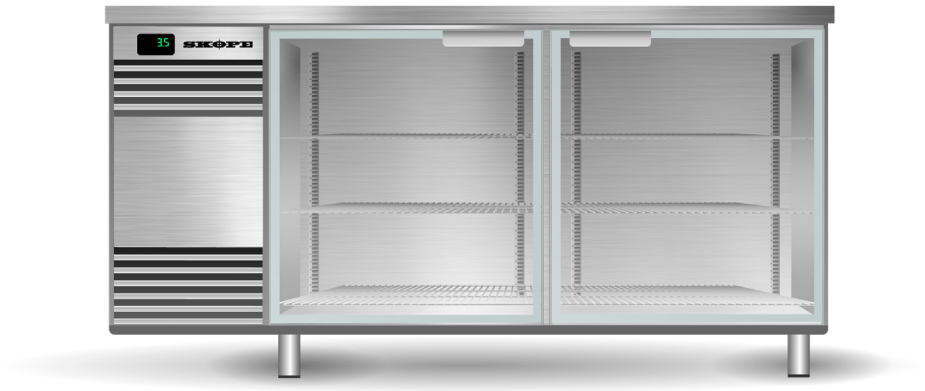

A 2-door under-bar glass chiller designed to keep your bar glasses cool and easily accessible to service staff in busy bars, clubs, and hotels. With a sleek aesthetic, including frameless glass doors, you can create an integrated look for all under-counter glass door bar refrigeration alongside SKOPE's BackBar range. The body is made from powder-coated, galvanised steel with colour options; it can also be upgraded to full stainless steel construction. The cabinet features wire shelving that can accommodate glass racks at either 355 mm × 430 mm, or 430 mm × 430 mm, for keeping your glasses chilled. The glass doors are designed for condensation protection in standard operating environments via the double-glazed, argon-filled, low-e, insulated panels. The glass chiller is a remote version, with self-contained R290 natural refrigerant also available. The fridge is certified to all Australian and New Zealand refrigeration and electrical safety standards.


2 YEAR
Warranty

Natural Refrigerant

© 2022 SKOPE Industries Limited | We reserve the right to alter specifications without notice.

Email: skope@skope.com AUS Freephone: 1800 121 535 NZ Freephone: 0800 947 5673 skope.com

GC.2.GSW.r

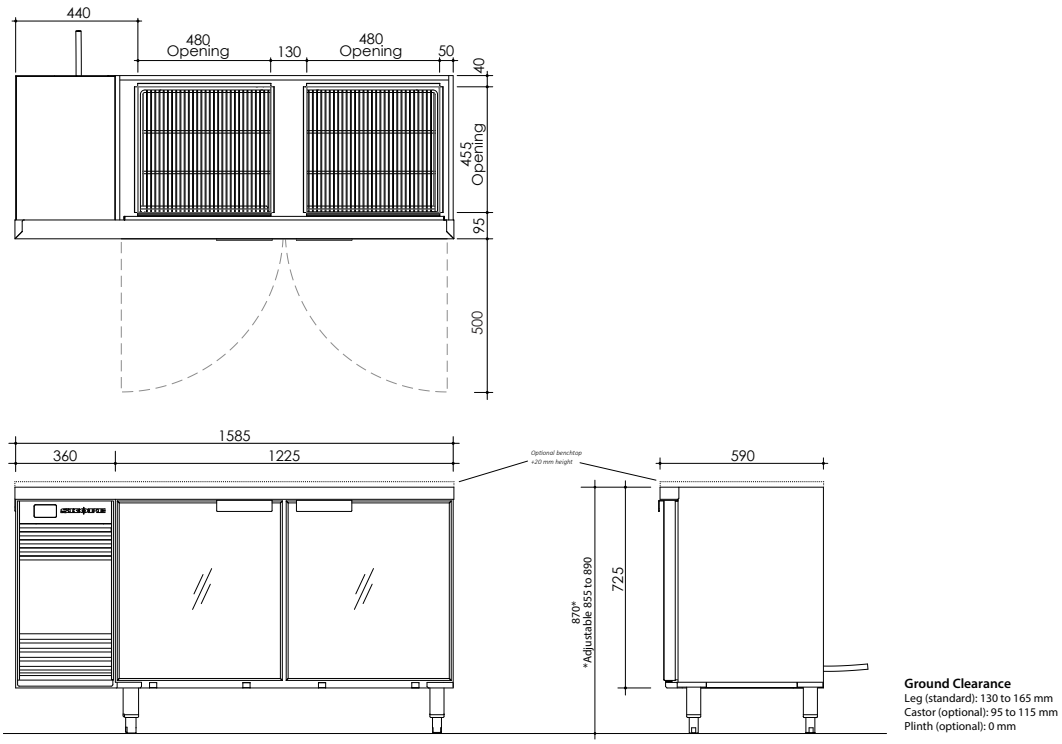

Cabinet

Type	Glass Chiller		
Finish	Powder-coated galvanised steel or stainless steel		
Insulation	Type	PU foam	
	Thickness (mm)	50	
	Blowing Agent	Cyclo-iso pentane (C5H10/C5H12)	
Doors	Type	Glass swing door (double-glazed, low-e, argon-filled)	
	Opening Size	Height (mm)	535
		Width (mm)	510
Top Opening		Depth (mm)	455
		Width (mm)	480
Shelving	Six powder-coated wire shelves 1 × fixed bottom shelf (550W × 450D), 1 × fixed bottom shelf (515W × 450D), 2 × adjustable height shelf (550W × 450D), 2 × adjustable height shelf (515W × 450D)		
Lighting	Sign	n.a.	
	Interior	n.a.	
Night Lid	Perspex		

Dimensions†

	External	Internal	Packed
Width (mm)	1585	1120	TBC
Depth (mm)	590	475	TBC
Height (mm)	**855 to 890 (standard legs)** 725 (plinth) 820 to 840 (castors)	545	TBC
Weight (kg)	158		TBC
Capacity (L)	290		
Footprint (m^2)	0.94		

Performance

Temperature Range (°C)	1 to 4		
Maximum Ambient Temperature (°C)	40		
Sound Level (dB(A))	Standard	< 60	

Ventilation

Top	**Not required**	**Sides**	Not required	Rear	Not required

Electrical

Supply	220-240 volts a.c., 50 Hz, single phase supply
Cord	1.9 m power cord with 3-pin, 10 amp plug
Current Draw (A)	2.6

Remote Services

Location	Rear or base			
Drain Size	OD 19 mm			
Pipe Connection	Liquid line	OD 6.35 mm	Suction line	OD 9.52 mm

Refrigeration

Controller	SCS controller			
System Type	Remote cartridge			
Cartridge Weight (kg)	16			
Refrigerant/Charge	Thermostatic expansion valve fitted to suit refrigerant (R134a or R404A standard)/Nitrogen holding charge			
Nominal Capacity (W)	n.a.			
Heat Rejection (W)	Average	n.a.	Peak	n.a.
Remote Duty (W)	310			
Defrost Type	Automatic, off-cycle			

Dimensional Tolerances

† Allow for dimensional tolerances when installing the cabinet(s).

Linear dimensions	Single cabinet	Multiple cabinets	
		At each joint	At each end wall
Less than 1 metre	±5 mm	±5 mm	+15 mm
More than 1 metre	-5 mm to +10 mm	-5 mm to +10 mm	+15 mm

GC.2.GSW.r
on the SKOPE website

© 2022 SKOPE Industries Limited | We reserve the right to alter specifications without notice.

Email: skope@skope.com AUS Freephone: 1800 121 535 NZ Freephone: 0800 947 5673 skope.com