


# specifications

## OD400-2

### Open Deck Fridge




#### CABINET DIMENSIONS

	External	Internal
<b>Height:</b>	1400mm	850mm
<b>Width:</b>	900mm	820mm
<b>Depth:</b>	660mm	350-450mm
<b>Floor area:</b>	0.59m <sup>2</sup> (includes rear spacer)	
<b>Gross volume</b>	251L	

#### Dimensional tolerances

Before installing this cabinet allow the following dimensional tolerances:

Linear dimensions	Overall cabinet dimensions	Length of multiple cabinets	
		At each joint	At each end wall
Less than 1 metre	±5mm	±5mm	+15mm
More than 1 metre	-5mm to +10mm	-5mm to +10mm	+15mm

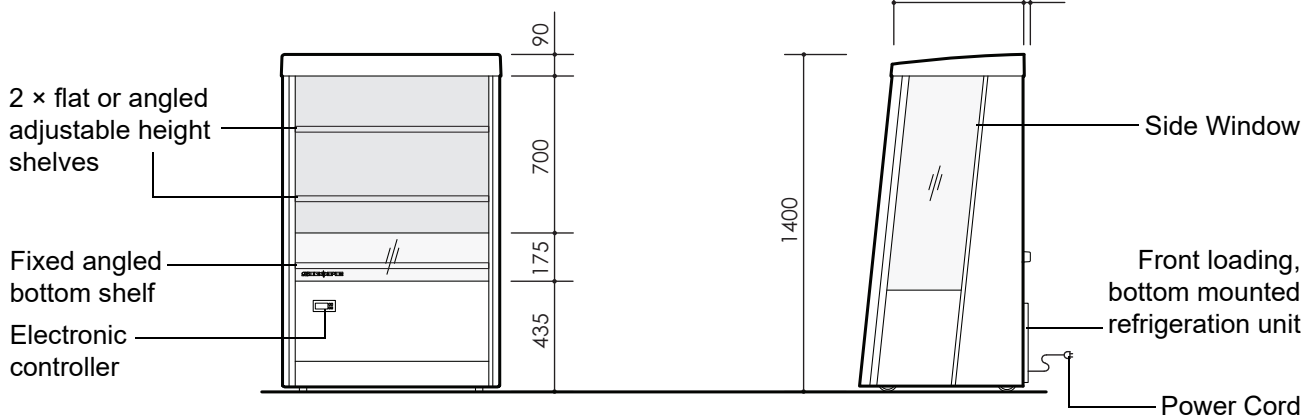

#### CABINET SPECIFICATIONS

<b>Doors:</b>	n.a.
<b>Shelves:</b>	2 x adjustable height and angle shelves and 1 x fixed angled bottom shelf. Top shelf: 800mm wide x 270mm deep. Middle shelf: 800mm wide x 295mm deep. Bottom shelf: 815mm wide x 330mm deep. Optional gravity feed matting available.
<b>Weight:</b>	135 kg
<b>Electrical safety climate class</b>	3
<b>Internal lighting:</b>	2 x 9 Watt LED strip side lights (18 Watts total)
<b>Sign lighting:</b>	n.a.
<b>Electrical:</b>	220-240 Volts a.c. 50 Hz, single phase supply, 4.0 Amps
<b>Temperature range:</b>	1°C to 5°C (2°C to 4°C product mass average)
<b>GEMS class</b>	M1
<b>GEMS energy consumption</b>	11.66 kWh/24h
<b>GEMS annual running cost</b>	\$1,278 p.a. (@ \$0.30/kWh)
<b>Refrigeration system:</b>	Electronically controlled, bottom mounted SKOPE refrigeration unit (UB84ANF)
<b>Electronic controller:</b>	Carel S4 Evo
<b>Refrigerant:</b>	R134a / 380g
<b>Nominal capacity:</b>	885 Watts
<b>Drainage:</b>	No plumbing required

SKOPE Industries Limited reserve the right to alter specifications without notice. Copyright © 2015 SKOPE Industries Limited

PSS0413 Rev. 2.1 Mar. 2021



**SKOPE INDUSTRIES LIMITED**

New Zealand Freephone: 0800 947 5673, Australian Freephone: 1800 121 535

Email: skope@skope.com Website: www.skope.com

