


specifications

TME650-A Series

Top Mount ActiveCore
One Door Upright Chiller

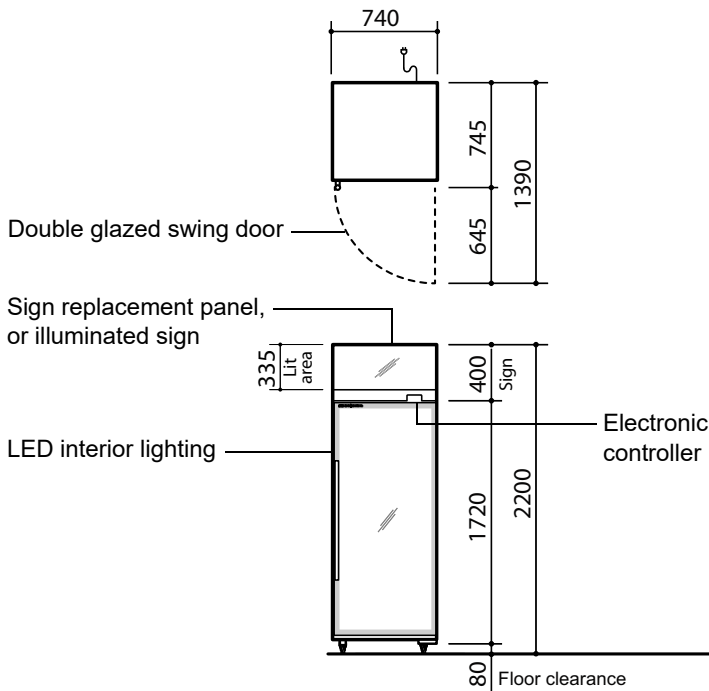

CABINET DIMENSIONS

	External	Internal
Height:	2200mm	1570mm
Width:	740mm	640mm
Depth:	745mm	554mm
Floor area:	0.55m ² (includes door handle)	

* Depth 695mm excludes removable door handle and door lock bracket.


Dimensional tolerances

Before installing this cabinet allow the following dimensional tolerances:

Linear dimensions	Overall cabinet dimensions
Less than 1 metre	±5mm
More than 1 metre	-5mm to +10mm

Length of multiple cabinets

At each joint	At each end wall
±5mm	+15mm
-5mm to +10mm	+15mm

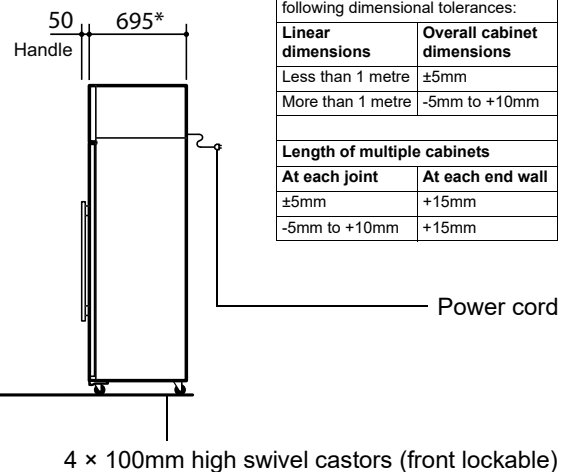

Copyright © 2016 SKOPE Industries Limited

GENERAL SPECIFICATIONS

Temperature range	1°C to 4°C (adjustable up to 15°C)	
Climate class	5 (Tested at 43°C)	
Door	Lockable, self-closing, reversible, double glazed, single Low-E, argon filled, toughened safety glass swing door (hinged RH)	
Internal Volume	610 litres	
Interior lighting	1 x 22W T8 LED tube (Ø26mm x 1500mm) side light	
Shelves	5 adjustable height wire shelves: 625mm wide x 470mm deep	
Power supply	220-240 Volts a.c. 50 Hz, single phase supply. Supplied with 10 Amp 3-Pin plug	
Current draw	3.5 Amps (includes unit 2.9 Amps)	
Refrigeration system	Removable ActiveCore top mount refrigeration unit (UTHCCI-0002)	
Refrigerant	R134a / 380g	
Nominal capacity	836 Watts	
Controller	Carel S4 electronic controller	
Drainage	No plumbing required	
Weight	170 kg	

INDIVIDUAL SPECIFICATIONS

Model	TME650-A	TME650-AC
Part number	SM65GV	SM65BV
Sign	Sign replacement panel	400mm high illuminated sign
Sign lighting	n.a.	1 x 11W T8 LED tube (Ø26mm x 600mm)

SKOPE Industries Limited reserve the right to alter specifications without notice.

PSS0470 Rev. 2.1 Mar. 2018



SKOPE INDUSTRIES LIMITED

Australian Freephone: 1800 121 535, New Zealand Freephone: 0800 947 5673

Email: skope@skope.co.nz, Website: www.skope.com

