



# Electrolux

## Modular Cooking Range Line 700XP Two Wells Electric Fryer Top 12 liter

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



Electrolux

Modular Cooking Range Line  
700XP Two Wells Electric Fryer Top 12 liter



Modular Cooking Range Line

700XP Two Wells Electric Fryer Top 12 liter

**371080 (E7FREH2E00)** 12+12-lt electric fryer top with 2 wells and 2 baskets, internal heating elements

**371143 (E7FREH2E0N)** 12+12-lt electric fryer top with 2 wells and 2 baskets, internal heating elements

### Short Form Specification

Item No. \_\_\_\_\_

To be installed on open base installations, bridging supports or cantilever systems. High efficiency tilting incoloy armoured heating elements (17.4kW) placed inside the wells. Deep drawn wells. Oil drains through a tap on the front. Exterior panels in stainless steel with Scotch Brite finish. One piece pressed work top in 1.5 mm thick stainless steel. Right-angled side edges to allow flush-fitting junction between units.

### Main Features

- Unit to be mounted on open base cupboards, bridging supports or cantilever systems.
- Deep drawn V-Shaped wells.
- High efficiency tilting heating elements attached inside the wells.
- Thermostatic regulation of oil temperature up to a maximum of 185 °C.
- Overheat protection thermostat as standard on all units.
- Oil drains through a tap positioned on the front the wells.
- All major compartments located in front of unit for ease of maintenance.
- IPX 4 water protection.

### Construction

- Interior of well with rounded corners for ease of cleaning.
- All exterior panels in Stainless Steel with Scotch Brite finishing.
- One piece pressed 1.5 mm work top in Stainless steel.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.

### Included Accessories

- 2 of Basket for 12lt electric fryer tops PNC 921629

### Optional Accessories

- Kit 4 wheels - 2 swivelling with brake - it is mandatory to install base support and wheels PNC 206135
- Support for bridge type installation, 800mm PNC 206137
- Support for bridge type installation, 1000mm PNC 206138
- Support for bridge type installation, 1200mm PNC 206139
- Support for bridge type installation, 1400mm PNC 206140
- Support for bridge type installation, 1600mm PNC 206141
- Chimney upstand, 800mm PNC 206304
- Right and left side handrails PNC 206307
- Base support for feet or wheels - 800mm (700/900) PNC 206367
- Rear paneling - 800mm (700/900) PNC 206374
- Rear paneling - 1000mm (700/900) PNC 206375

APPROVAL: \_\_\_\_\_



**Electrolux**

**Modular Cooking Range Line  
700XP Two Wells Electric Fryer Top  
12 liter**


- Rear paneling - 1200mm (700/900)  PNC 206376
- Chimney grid net, 400mm (700XP/900)  PNC 206400
- Frontal handrail, 800mm  PNC 216047
- Frontal handrail, 1200mm  PNC 216049
- Frontal handrail, 1600mm  PNC 216050
- Large handrail - portioning shelf, 400mm  PNC 216185
- Large handrail - portioning shelf, 800mm  PNC 216186
- 2 side covering panels for top appliances  PNC 216277
- Basket for 12lt electric fryer tops  PNC 921629
- 2 baskets for 2x5lt and 7lt electric fryers  PNC 960638



**Modular Cooking Range Line  
700XP Two Wells Electric Fryer Top 12 liter**

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2015.12.03

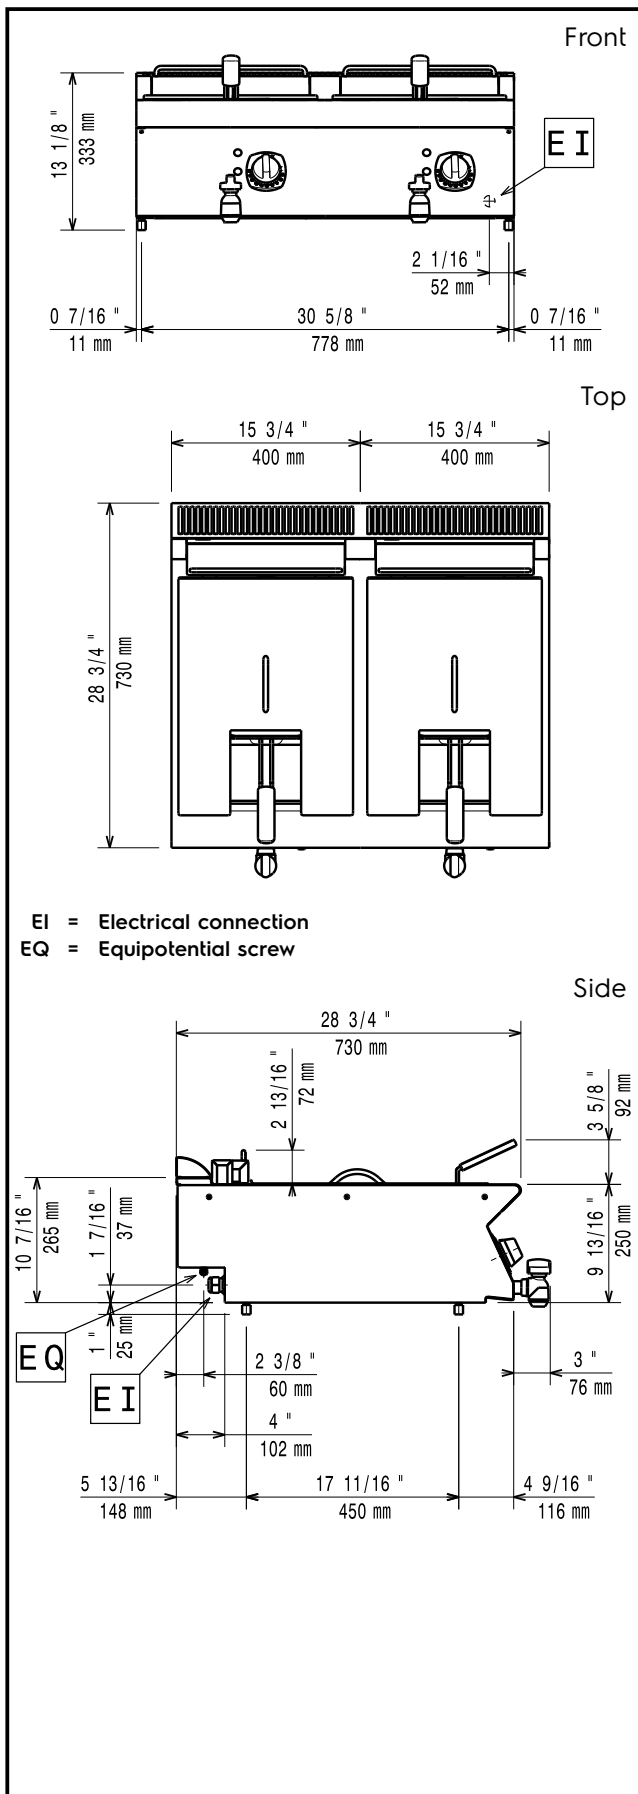

**EI = Electrical connection**  
**EQ = Equipotential screw**

## Electric

<b>Supply voltage:</b>	
371080 (E7FREH2E00)	400 V/3N ph/50/60 Hz
371143 (E7FREH2E0N)	230 V/3 ph/50/60 Hz
<b>Total Watts:</b>	17.4 kW

## Key Information:

<b>Usable well dimensions (width):</b>	240 mm
<b>Usable well dimensions (height):</b>	235 mm
<b>Usable well dimensions (depth):</b>	420 mm
<b>Well capacity:</b>	10 lt MIN; 12 lt MAX
<b>Thermostat Range:</b>	105 °C MIN; 185 °C MAX
<b>Net weight:</b>	45 kg
<b>Shipping weight:</b>	54 kg
<b>Shipping height:</b>	820 mm
<b>Shipping width:</b>	540 mm
<b>Shipping depth:</b>	860 mm
<b>Shipping volume:</b>	0.38 m <sup>3</sup>

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.