## **Modular Cooking Range Line** 700XP Full Module Electric Fry Top, Mild Steel

ITEM #	
MODEL #	
NAME #	
SIS #	
AIA#	
AIA #	



Modular Cooking Range Line

700XP Full Module Electric Fry Top, Mild Steel

371186 (E7FTEHSSIO)

Full module electric fry top with smooth mild steel plate, thermostatic control

371199 (E7FTEHSSIN)

Full module electric fry top with smooth mild steel plate, thermostatic control

(E7FTEHSPIO)

371187

Full module electric fry top with 2/3 smooth

and 1/3 ribbed mild steel plate, thermostatic

371200 (E7FTEHSPIN) Full module electric fry top with 2/3 smooth and 1/3 ribbed mild steel plate, thermostatic

control

## **Short Form Specification**

### Item No.

To be installed on open base installations or bridging supports. Smooth cooking surface in mild steel. Temperature range from 110°C to 280°C. Removable drawer below the cooking surface for the collection of grease and fat. Exterior panels in stainless steel with Scotch Brite finish. One piece pressed work top in 1.5 mm thick stainless steel. Right-angled side edges to allow flush-fitting junction between units.

#### Main Features

- Unit to be mounted on open base cupboards, bridging supports or cantilever systems.
- Large drain hole on cooking surface permits the draining of fat into large 1,5 liter collector placed under the cooking surface.
- Large grease collection container available as optional accessory to be installed under top units over open base cupboard.
- Safety thermostat and thermostatic control.
- Stainless steel high splash guard on the rear and sides of cooking surface. Splash guard can be easily removed for cleaning.
- Temperature range of griddle from 110 °C to 300 °C.
- IPX 4 water protection.
- Infrared heating elements mounted below the cooking surface.

#### Construction

- Cooking surface in mild steel for optimum grilling results.
- Cooking surface to be completely smooth or 2/3 smooth and 1/3 ribbed.
- Exterior panel in Stainless Steel with Scotch Brite finish.
- One piece pressed 1.5 mm work top in Stainless
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.

### Optional Accessories

- Scraper for smooth plate fry tops PNC
- 164255 • Kit 4 wheels - 2 swivelling with **PNC** 206135
- brake it is mandatory to install base support and wheels (only for 371186, 371187)
- Support for bridge type **PNC** installation, 800mm 206137 Support for bridge type **PNC** 206138 installation, 1000mm • Support for bridge type **PNC**
- installation, 1200mm 206139 Support for bridge type **PNC** 206140 🗖 installation, 1400mm
- Support for bridge type PNC 206141 installation, 1600mm **PNC** Water column with swivel arm
- (water column extension not 206289 included)
- **PNC** Water column extension for 700 206291 🗆 line

APPROVAL:




# Modular Cooking Range Line 700XP Full Module Electric Fry Top, Mild Steel

• Chimney upstand, 800mm	PNC	206304
Right and left side handrails	PNC	206307
<ul> <li>Grease/oil kit container for 700 line frytops (half and module) and 900 line frytops (module)</li> </ul>	PNC	206346
<ul> <li>Rear paneling - 800mm (700/900) (only for 371186)</li> </ul>	PNC	206374
<ul> <li>Rear paneling - 1000mm (700/900) (only for 371186)</li> </ul>	PNC	206375
<ul> <li>Chimney grid net, 400mm (700XP/900)</li> </ul>	PNC	206400
<ul> <li>Scraper for ribbed plate fry tops - kit includes knife blades for both smooth and ribbed surface (only for 371187, 371200)</li> </ul>	PNC	206420
• Frontal handrail, 800mm	PNC	216047
• Frontal handrail, 1200mm	PNC	216049
• Frontal handrail, 1600mm	PNC	216050
<ul> <li>Large handrail - portioning shelf, 400mm</li> </ul>	PNC	216185
<ul> <li>Large handrail - portioning shelf, 800mm</li> </ul>	PNC	216186
<ul> <li>2 side covering panels for top appliances</li> </ul>	PNC	216277





## Modular Cooking Range Line 700XP Full Module Electric Fry Top, Mild Steel

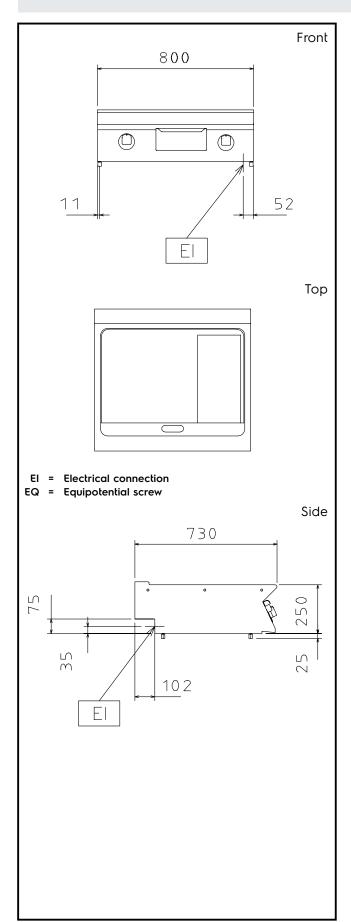

Electric	
Supply voltage:	
371186 (E7FTEHSSIO)	400 V/3 ph/50/60 Hz
371199 (E7FTEHSSIN)	230 V/3 ph/50/60 Hz
371187 (E7FTEHSPIO)	400 V/3 ph/50/60 Hz
371200 (E7FTEHSPIN)	230 V/3 ph/50/60 Hz
Electrical power:	
371186 (E7FTEHSSIO)	8.4 kW
371199 (E7FTEHSSIN)	7.8 kW
371187 (E7FTEHSPIO)	8.4 kW
371200 (E7FTEHSPIN)	7.8 kW
Total Watts:	
371186 (E7FTEHSSIO)	8.4 kW
371199 (E7FTEHSSIN)	7.8 kW
371187 (E7FTEHSPIO)	8.4 kW
371200 (E7FTEHSPIN)	7.8 kW
Key Information:	
Cooking surface width:	730 mm

Cooking surface depth:	540 mm
Working Temperature MIN:	110 °C
Working Temperature MAX:	300 °C
Net weight:	70 kg
Shipping weight:	
371186 (E7FTEHSSIO)	75 kg
371199 (E7FTEHSSIN)	84 kg
371187 (E7FTEHSPIO)	84 kg
371200 (E7FTEHSPIN)	84 kg
Shipping height:	540 mm
Shipping width:	820 mm
Shipping depth:	860 mm
Shipping volume:	0.38 m <sup>3</sup>

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.

