



UPSTER

Cleaner. Faster. More Economical.

UPster COMMERCIAL DISHWASHING RANGE: THE POWER OF DONE



MEIKO engineering starts by thinking about *the people who are in charge of getting things done.*

We're engineering our products for the Food and Beverage Manager, the local Cafe Owner, the Aged Care Operations Manager who are all trying to maximise their operating budget without compromising their standards for cleanliness.

It's this kind of engineering that results in features that draw attention to MEIKO – and for all the right reasons.

Cleaner. Faster. More Economical.

UPster UNDERCOUNTER MACHINES

MEIKO's U400 and U500 undercounter machine combines state-of-the-art, labour-saving technology with outstanding, super-efficient performance – all in a space-saving, get-it-done, package. The UPster is our entry level dish washing range, compact and competitively priced.

What others call extras, we call standard for all of our UPster machines;

- Double wall construction for sound and heat insulation
- Exclusive soft start feature starts the wash pump slowly and gradually builds water pressure, protecting your fragile glassware from shifting or breaking
- Pumped final rinse giving perfect results every time
- Drain pump



Dimensions UPster U 400

Height	700 mm
Width	460 mm
Depth	600 mm
Entry Height	300 mm
Basket Dimensions	400 x 400 mm

Technical Data

Programme Cycle	120 / 180 / 240 s
Theoretical basket Capacity	30 / 20 / 15 baskets/h
Water Consumption	2.2 l/basket
Tank Content	11l
Total Connected Load	15 amp
Feed Water Temperature	10 - 60° C



Dimensions UPster U 500

Height	820 mm
Width	600 mm
Depth	600 mm
Entry Height	320 mm
Basket Dimensions	500 x 500 mm

Technical Data

Programme Cycle	120 / 180 / 240 s
Theoretical basket Capacity	30 / 20 / 15 baskets/h
Water Consumption	3 l/basket
Tank Content	20l
Total Connected Load	15 amp
Feed Water Temperature	10 - 60° C

Cleaner. Faster. More Economical.

PASS THROUGH MACHINE

The latest MEIKO pass-through machine UPster H 500, is constructed in accordance with the principles long associated with German engineered build quality.

Apart from providing spotless and sparkling end results, MEIKO has also delivered an easy to use, economical, and energy efficient dish washer that provides the operator with a trusted and internationally accepted concept: Out-standing performance with low running costs.



Our aim is always to ensure a safe and smooth operation for the operator, clean glass ware, crockery and cutlery, and total reliability. This philosophy combined with our totally functional products establishes this machine as the standard for a wide range of caterers.

Dimensions

UPster H 500

Height	440 mm
Width	635 mm
Depth	750 mm
Height	2050 / 2288 mm
Basket Dimensions	500 x 500 mm

Technical Data


Theoretical basket Capacity	40 baskets/h
Tank Content	22l
Total Connected Load	11.1 KW
Feed Water Temperature	10 - 60° C



UPster K RACK TYPE MACHINES

MEIKO's **UPster K Range** rack conveyors are reliable, quick and super efficient. A testament of MEIKO's commitment to manufacturing excellence, economy of operation, user-friendly concepts, and industry-leading features.

MEIKO's award-winning Waste Air Heat Recovery System reclaims heat generated by the machine and uses it to preheat the incoming water, reducing energy consumption, and allowing hot-water sanitisation from a cold water supply.

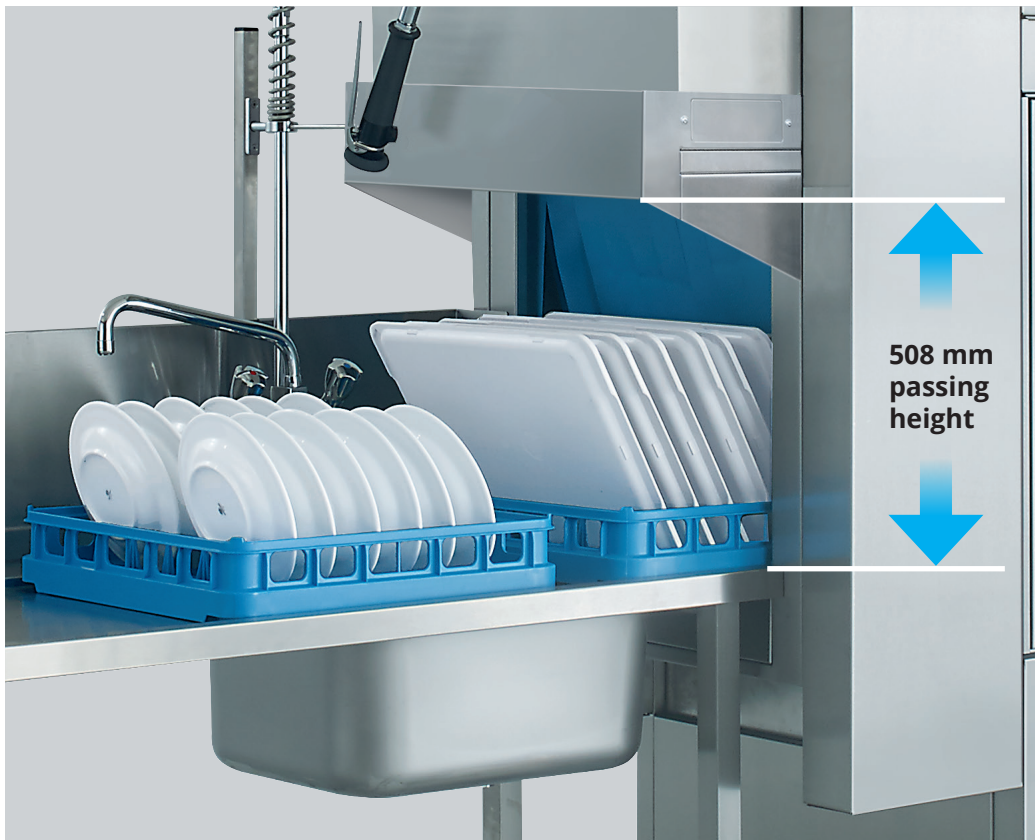

With the most generous passing height (508mm) of any rack type dishwashing machine in its class, it gets even bulky items such as tall pots and pans and long trays sparkling clean

Features

- Low water, energy and chemical consumption
- Upster K machines work with a built-in heat recovery system
- Fully automatic operation including automatic fill and start, with wash and rinse activated only when a rack is in place, saving water, detergent and energy.

UPster K RACK TYPE MACHINES

Features

- Because we keep all of the energy inside the machine, it keeps the indoor air quality at a pleasant level which staff will be sure to appreciate
- Double-wall insulated construction minimizes noise and heat loss, and keeps the exterior cool to the touch
- New touch control panel—ease of use, easy to read with infrared capability for easy rapid service energy
- Compact design—for easy access to every possible kitchen location
- Flush stainless steel panels on all sides to make cleaning a breeze



Dimensions	UPster K-S 160
Entry Height	508 mm
Basket Capacity	2.2 l/basket
Quantity Of Rinse Water	260 litres/h
Connection Load	21.3 kW incl. heat recovery and drying
Machine Length	1300 mm excl. drying / 1900 mm incl. drying

Dimensions	UPster K-S 200
Entry Height	508 mm
Basket Capacity	95 - 150 - 200 baskets/h
Quantity Of Rinse Water	260 litres/h
Connection Load	31.4 kW incl. heat recovery and drying
Machine Length	1550 mm excl. drying / 2150 mm incl. drying

RACK TYPE MACHINES

Thanks to their modular design, UPster K machines can be nice and compact or big and bold. But whatever size they are, they always make the best use of the available space. Fits beautifully into your kitchen layout, but still costs less than a made-to-measure machine.



Dimensions	UPster K-S 250
Entry Height	508 mm
Basket Capacity	125 - 190 - 250 baskets/h
Quantity Of Rinse Water	260 litres/h
Connection Load	31.4 kW incl. heat recovery and drying
Machine Length	2050 mm excl. drying / 2650 mm incl.

Dimensions	UPster K-M 280
Entry Height	508 mm
Basket Capacity	140 - 210 - 280 baskets/h
Quantity Of Rinse Water	260 litres/h
Connection Load	33.1 kW incl. heat recovery and drying
Machine Length	2350 mm excl. drying / 2950 mm incl. drying



Dimensions	UPster K-L 340
Entry Height	508 mm
Basket Capacity	170 - 260 - 340 baskets/h
Quantity Of Rinse Water	260 litres/h
Connection Load	39.6 kW incl. heat recovery and drying
Machine Length	2850 mm excl. drying / 3450 mm incl. drying

Combine different modules to get the best out of MEIKO technology. From simple dishwashing systems with straight sliding tables to motorised 90° or 180° roller conveyors, UPster K can be whatever you want it to be.

We would be happy to discuss your needs in more detail to decide which option best meets your requirements in regard to cost, efficiency and ergonomics.



MEIKO AUSTRALIA PACIFIC PTY LTD

Unit 4, 72-74 Gibbes Street
Chatswood NSW Australia 2067

Ph: 1300 562 500

Email: sales@meiko.com.au

 Follow us on LinkedIn

www.meiko.com.au