specifications


PG21.UPR.2.SD

ProSpec Series, 2 Door (Solid), Upright Fridge



Project:

Item No:

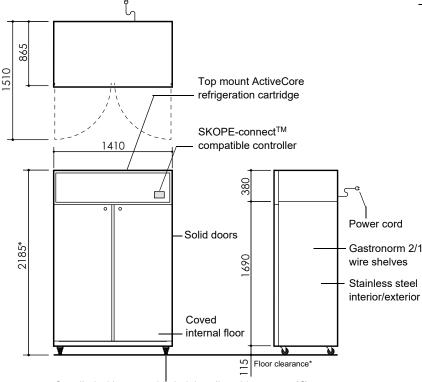

Supplied with removable height adjustable castors (Ø75mm wheel). Optional height adjustable legs available.

CABINET

Worktop

Model ID PG21.UPR.2.SD

SKOPE ID PP2R

Doors 2 × self-closing, lockable, solid swing doors with stay-open position at

over 90°

Internal door opening 2 × door openings: 1500mm high × 540mm wide

Shelves 10 × stainless steel GN 2/1 shelves: 530mm wide × 650mm deep

n.a.

Material 304 AISI stainless steel interior and exterior on all faces

PERFORMANCE

Max. ambient temp. 40°C

Temperature range 1°C to 4°C (adjustable via SKOPE-connect 1°C to 15°C)

Total energy consumption 4.2 kWh/24h

ELECTRICAL

Climate class 5 (40°C/40% RH)

Interior lighting 2 × 1400mm, 16W LED light (door activated)
Power cord Supplied with 2.3m, 10 Amp plug and lead
Power supply 220-240 Volts a.c. 50 Hz, single phase supply

Current draw 3.0 Amps (unit 2.6 Amps)

REFRIGERATION

Controller SCS Connect (SKOPE-connect compatible)

Connectivity interface Bluetooth® wireless technology

Refrigeration system Top mounted, integral, removable ActiveCore refrigeration unit (part

number UTHCNI-0010)

Refrigerant R290 / 99g (natural refrigerant)

Nominal capacity 740 Watts

Heat rejection (Avg/peak) 180 Watts/260 Watts
Drainage No plumbing required

 ${\sf SKOPE\ Industries\ Limited\ reserve\ the\ right\ to\ alter\ specifications\ without\ notice.\ Copyright\ @\ 2019\ SKOPE\ Industries\ Limited\ and\ property and\ prop$

SKOPE INDUSTRIES LIMITED

Australian Freephone: 1800 121 535, New Zealand Freephone: 0800 947 5673

Email: skope@skope.com, Website: www.skope.com

DIIVIENSIONS				
	External	Internal		
Height	2185mm*	1500mm		
Width	1410mm	1250mm		
Depth	865mm	675mm		
Floor area	1.21m ²	•		
Weight	230kg			
Internal volume	1266 litros			

DIMENSIONS

Internal volume 1266 litres

* With supplied castors fitted. See height variation below

Height variation		
Supplied castors	2185-2200mm	
Optional height adjustable legs	2220-2250mm	
No castors	2070mm	

Dimensional tolerar	nces		
Before installing this cabinet allow the following dimensional tolerances:			
Linear dimensions	inear dimensions Overall cabinet dim		
Less than 1 metre	2011111		
More than 1 metre			
	Length of multiple cabinets		
	At each joint	At each end wall	
Less than 1 metre	±5mm	+15mm	
More than 1 metre	-5mm to +10mm	+15mm	

Ventilation requirements		
Тор	300mm	
Sides	Not required	
Back	Not required	
Bottom	Not required	

PSS0596 Rev. 1.1 Nov. 2019



