


# specifications

## RF7.UBR.4.SD

ReFlex Series, 4 Door (Solid), Underbench Fridge

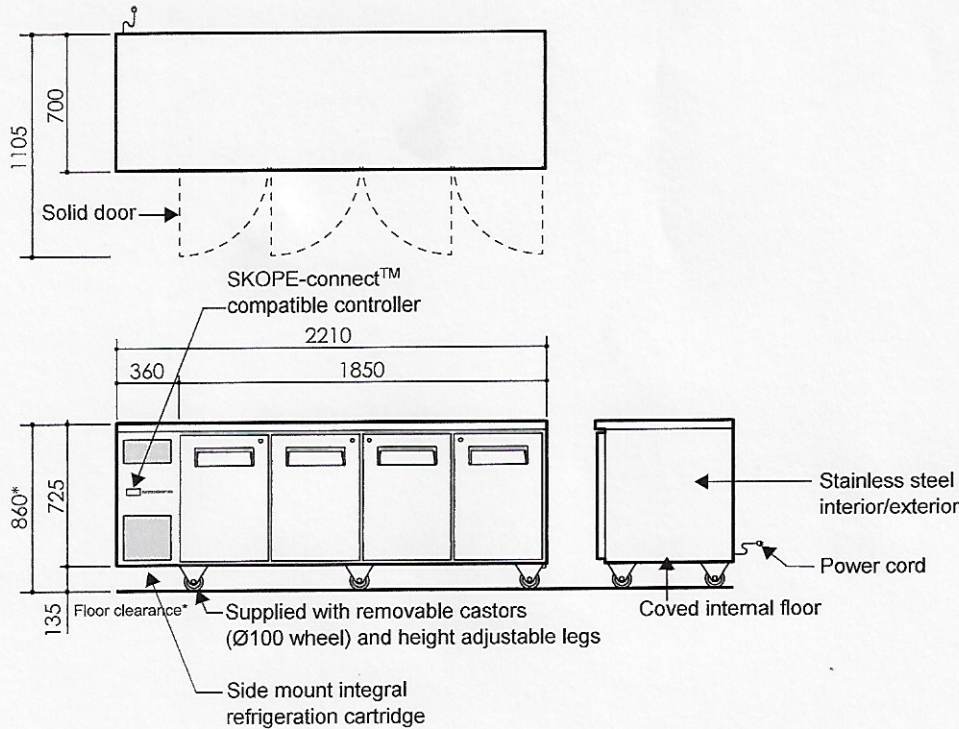

| CABINET                |  |
|------------------------|--|
| Model ID               | RF7.UBR.4.SD   |
| SKOPE ID               | RF7UBR4-SCLH-SD  |
| Doors                  | 4 × self-closing, lockable, solid swing doors. LH, LH, RH, RH                                  |
| Internal door opening  | 4 × door openings: 560mm high × 360mm wide   |
| Shelves                | 8 × adjustable height shelves: 495mm wide × 510mm deep   |
| Worktop                | Total thickness 45mm (0.7mm 304 AISI stainless steel over insulating cyclopentane foamed core) |
| Material               | 304 AISI stainless steel interior and exterior   |
| PERFORMANCE            |  |
| Max. ambient temp.     | 40°C   |
| Temperature range      | -1°C to 5°C  |
| ELECTRICAL             |  |
| Climate class          | 5 (40°C/40% RH)  |
| Interior lighting      | 3 × 400mm, 4W LED light (door activated)   |
| Power cord             | Supplied with 2.6m, 10 Amp plug and lead   |
| Power supply           | 220-240 Volts a.c. 50 Hz, single phase supply  |
| Current draw           | 2.0 Amps (includes unit 1.5 Amps)  |
| REFRIGERATION          |  |
| Controller             | SCS Connect (SKOPE-connect™ compatible)  |
| Connectivity interface | Bluetooth  |
| Refrigeration system   | Side mounted, integral, removable refrigeration cartridge (part number ULKCNI-0022)            |
| Refrigerant            | R290 / 95g (natural refrigerant)   |
| Nominal capacity       | 650 Watts  |
| Drainage               | No plumbing required   |

| DIMENSIONS      |                    |                |
|-----------------|--------------------|----------------|
| Height          | External 860mm*    | Internal 570mm |
| Width           | 2210mm             | 1740mm         |
| Depth           | 700mm              | 530mm          |
| Floor area      | 1.55m <sup>2</sup> |                |
| Weight          | 155kg              |                |
| Internal volume | 526 litres         |                |

\* With supplied castors fitted. See height variation below

| Height variation                |               |
|---------------------------------|---------------|
| Supplied castors                | 860mm         |
| Supplied height adjustable legs | 870mm - 910mm |
| No castors or legs              | 725mm         |

| Dimensional tolerances   |                             |                  |
|--|-----------------------------|------------------|
| Before installing this cabinet allow the following dimensional tolerances: |                             |                  |
| Linear dimensions  | Overall cabinet dimensions  |                  |
| Less than 1 metre  | ±5mm                        |                  |
| More than 1 metre  | -5mm to +10mm               |                  |
|  | Length of multiple cabinets |                  |
|  | At each joint               | At each end wall |
| Less than 1 metre  | ±5mm                        | +15mm            |
| More than 1 metre  | -5mm to +10mm               | +15mm            |

| Ventilation requirements |              |
|--------------------------|--------------|
| Top                      | Not required |
| Sides                    | Not required |
| Back                     | Not required |
| Bottom                   | Not required |