

specifications

RF6.UBR.1.SD

ReFlex Series, 1 Door (Solid), Underbench Fridge



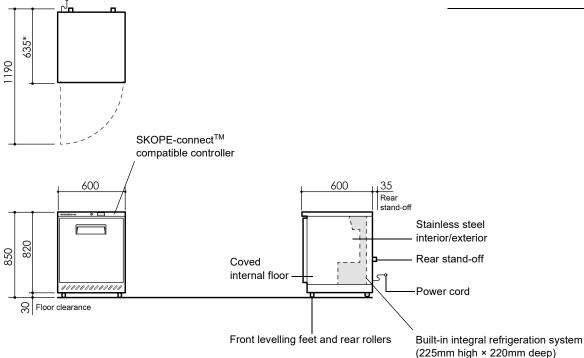

CABINET

Door 1 × self-closing, lockable, reversible, solid swing door (hinged RH)

Internal door opening 1 × door opening: 645mm high × 485mm wide

Shelves 3 × shelves: 2 × adjustable height and 1 × floor mounted.

Top and middle adjustable height shelves: 480mm wide × 350mm deep

Bottom floor mounted shelf: 480mm wide × 180mm deep

Worktop

Material 304 AISI stainless steel interior and exterior

PERFORMANCE

Max. ambient temp.

Temperature range 1°C to 4°C (adjustable with SKOPE-connect 1°C to 15°C)

GEMS class

GEMS energy consumption 1.30 kWh/24h

GEMS annual running cost \$143 p.a. (@ \$0.30/kWh)

ELECTRICAL

Electrical safety climate class Interior lighting

Supplied with 2.0m, 10 Amp plug and lead Power cord Power supply 220-240 Volts a.c. 50 Hz, single phase supply

Current draw

REFRIGERATION

SCS Connect (SKOPE-connectTM compatible) Controller

Connectivity interface Bluetooth® wireless technology Refrigeration system Built-in, integral, refrigeration system Refrigerant R600a / 45g (natural refrigerant)

Nominal capacity 200 Watts 55 Watts/60 Watts Heat rejection (Avg/peak) No plumbing required

SKOPE Industries Limited reserve the right to alter specifications without notice. Copyright © 2019 SKOPE Industries Limited

DIMENSIONS

22. 10.0.10			
	External	Internal	
Height	850mm	655mm	
Width	600mm	495mm	
Depth	635mm*	430mm	
Floor area	0.38m ²		
Weight	50kg		
Gross volume	139 L		
Net volume	80 L		
* Denth 635mm includes 35mm rear stand-off			

Dimensional tolerances				
Before installing this cabinet allow the following dimensional tolerances:				
Linear dimensions	Overall cabinet dimensions			
Less than 1 metre	±5mm			
More than 1 metre	-5mm to +10mm			
	Length of multiple cabinets			
	At each joint	At each end wall		
Less than 1 metre	±5mm	+15mm		
More than 1 metre	-5mm to +10mm	+15mm		

Ventilation requirements		
Тор	Not required	
Sides	50mm each side	
Back	35mm (provided by rear stand-off)	
Bottom	30mm (provided by feet)	



