


specifications

TME650N-A Series

ActiveCore Series, 1 Door (Glass), Upright Fridge

Project: _____

Item No: _____

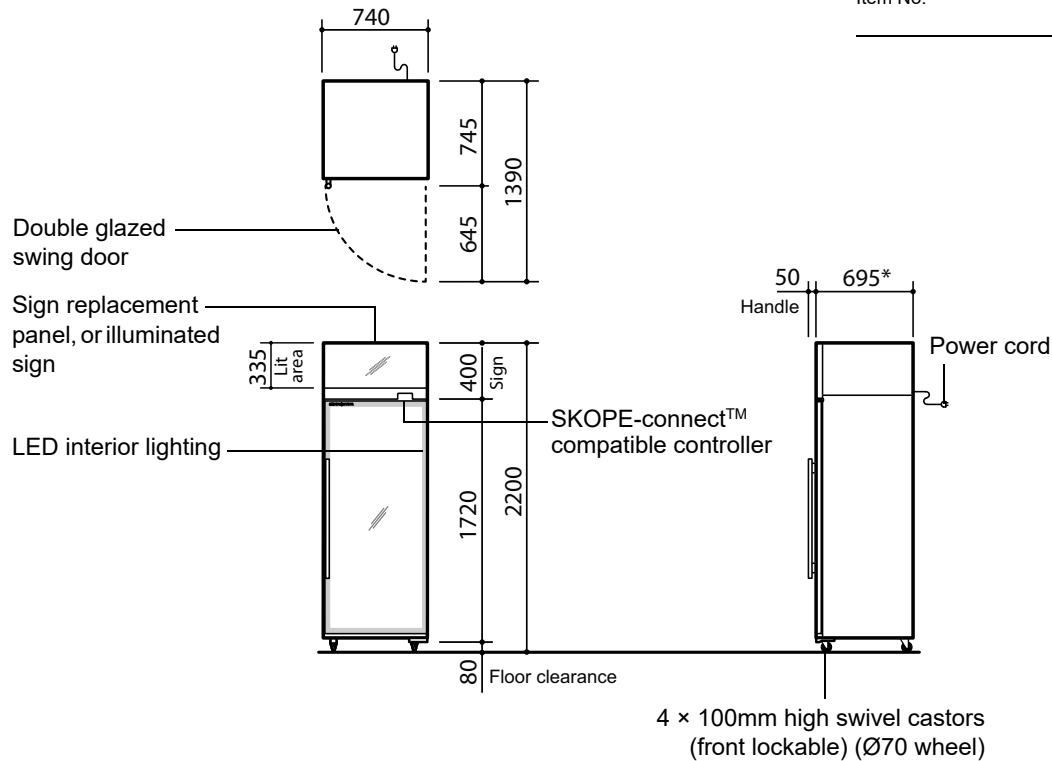

| CABINET | |
|---------------------------------|--|
| Model ID | TME650N-A TME650N-AC |
| Doors | 1 x self-closing, reversible, double glazed, single Low-E, lockable, argon filled, toughened safety glass swing door (hinged RH) |
| Internal door opening | 1 x door openings: 1570mm high x 620mm wide |
| Shelves | 5 x adjustable height wire shelves: 625mm wide x 470mm deep |
| Sign | Sign replacement panel Illuminated sign |
| Material | Powdercoat galvanized steel |
| PERFORMANCE | |
| Max. ambient temp. | 40°C |
| Temperature range | 1°C to 4°C (adjustable via SKOPE-connect 1°C to 15°C) |
| GEMS class | M1 M1 |
| GEMS energy consumption | 2.36 kWh/24h 2.46 kWh/24h |
| GEMS annual running cost | \$258 p.a. (@ \$0.30/kWh) \$269 p.a. (@ \$0.30/kWh) |
| ELECTRICAL | |
| Electrical safety climate class | 5 |
| Interior side lighting | 1 x 1400mm, 15W LED 1 x 1400mm, 15W LED |
| Sign lighting | n.a. 1 x 670mm, 7W LED |
| Power cord | Supplied with 2.3m, 10 Amp plug and lead |
| Power supply | 220-240 Volts a.c. 50 Hz, single phase supply |
| Current draw | 2.9 Amps (includes unit 2.6 Amps) |
| REFRIGERATION | |
| Controller | SCS Connect (SKOPE-connect™ compatible) |
| Connectivity interface | Bluetooth |
| Refrigeration system | Top mounted, integral, removable ActiveCore refrigeration unit (UTHCNI-0010) |
| Refrigerant | R290 / 99g (natural refrigerant) |
| Nominal capacity | 740 Watts |
| Heat rejection (Avg/peak) | 105 Watts/150 Watts |
| Drainage | No plumbing required |

| DIMENSIONS | | |
|--------------|--------------------|----------|
| | External | Internal |
| Height | 2200mm | 1570mm |
| Width | 740mm | 640mm |
| Depth | 745mm | 554mm |
| Floor area | 0.55m ² | |
| Weight | 170kg | |
| Gross volume | 610L | |

* Depth 695mm excludes removable door handle and door lock bracket

| Dimensional tolerances | | |
|--|-----------------------------|------------------|
| Before installing this cabinet allow the following dimensional tolerances: | | |
| Linear dimensions | Overall cabinet dimensions | |
| Less than 1 metre | ±5mm | |
| More than 1 metre | -5mm to +10mm | |
| | Length of multiple cabinets | |
| | At each joint | At each end wall |
| Less than 1 metre | ±5mm | +15mm |
| More than 1 metre | -5mm to +10mm | +15mm |

| Ventilation requirements | |
|--------------------------|--------------|
| Top | 300mm |
| Sides | Not required |
| Back | Not required |
| Bottom | Not required |

SKOPE Industries Limited reserve the right to alter specifications without notice. Copyright © 2018 SKOPE Industries Limited

PSS0517 Rev. 2.4 Jul. 2020

SKOPE INDUSTRIES LIMITED

Australian Freephone: 1800 121 535, New Zealand Freephone: 0800 947 5673

Email: skope@skope.com, Website: www.skope.com

