

specifications




CC300-2SW

SKOPE Counterline - Slimline
2 Door (Swing), Integral Fridge

CABINET DIMENSIONS

	External	Internal
Height:	725mm*	545mm
Width:	1600mm	1120mm
Depth:	600mm	485mm
Floor area:	0.96m ²	
Gross volume	335L	

* Height excludes castors or legs

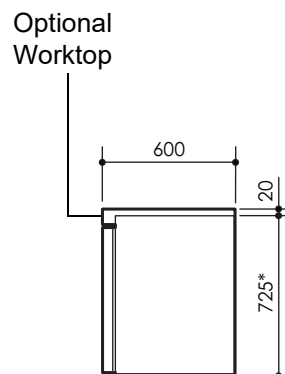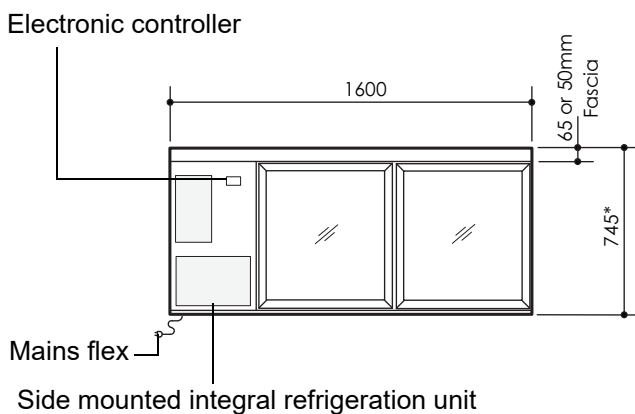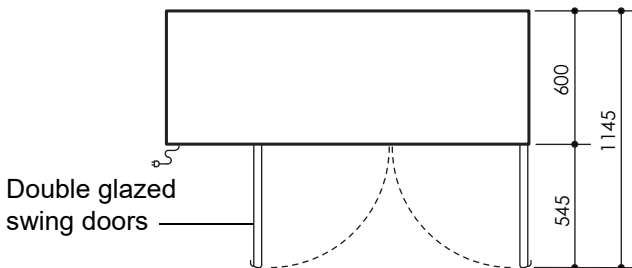

CABINET SPECIFICATIONS

Doors	Self-closing, double glazed, toughened Low-E safety glass with aluminium extrusion or insulated solid doors
Internal door opening size	2 door openings: 544mm high x 520mm wide
Shelves	Adjustable height, white plastic coated, steel wire shelves - two per door
Worktop (optional)	Optional 20mm high stainless steel worktop with 65mm fascia
Electrical safety climate class	5
Internal lighting	1 x 20W T8 Frosted LED Tube (Ø26 x 900mm, 5500K) - Switched
Electrical	230-240 Volts a.c. 50 Hz, single phase supply, 2.3 Amps
Temperature range	+1°C to +4°C
GEMS class	M1
GEMS energy consumption	5.33 kWh/24h
GEMS annual running cost	\$584 p.a. (@ \$0.30/kWh)
Refrigeration system	Side mounted, integral refrigeration unit (UE12AAC-173ZC)
Electronic controller	SKOPE CAREL ir33
Refrigerant	R134a / 425 g
Nominal capacity	581 Watts
Insulation	50mm polyurethane foam
Drainage	No plumbing required

SKOPE Industries Limited reserve the right to alter specifications without notice. Copyright © 2007 SKOPE Industries Limited

PSS0067 Rev. 4.1 Mar. 2021



SKOPE INDUSTRIES LIMITED

New Zealand Freephone: 0800 947 5673, Australian Freephone: 1800 121 535

Email: skope@skope.com Website: www.skope.com

