


specifications

SKB1200N-A Series

ActiveCore Series, 2 Door (Glass), Upright Fridge

Project: _____

Item No: _____

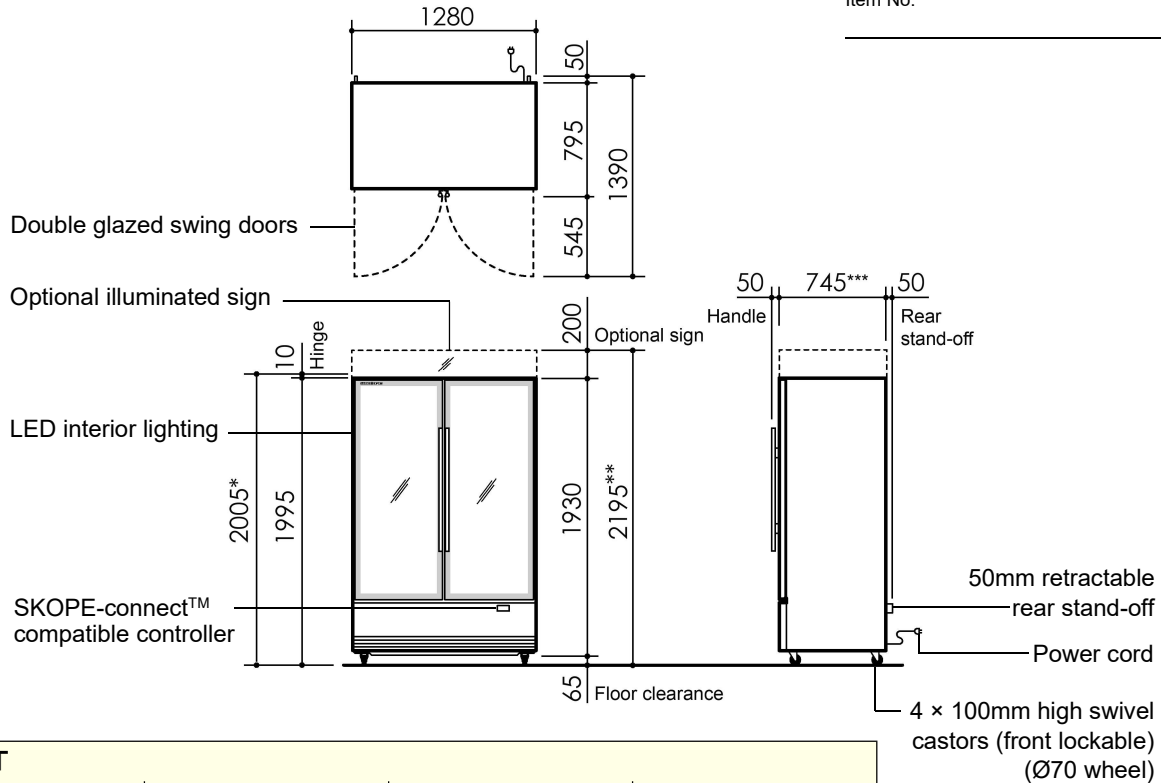

CABINET			
Model ID	SKB1200N-A	SKB1200N-AC	SKB1200N-ACX
Doors	2 x self-closing, double glazed, single Low-E, lockable, argon filled, toughened safety glass swing door (hinged LH, RH)		
Internal door opening	2 x door openings: 1454mm high x 525mm wide		
Shelves	8 x wire and 2 x stainless steel	10 x wire and 2x stainless steel	10 x wire and 2x stainless steel
	Wire shelves: Adjustable height, 577mm wide x 520mm deep Stainless steel bottom shelf: Not adjustable, 580mm wide x 515mm deep		
Sign	n.a.	Illuminated sign	Illuminated sign
Material	Powdercoat galvanized steel or stainless steel interior & exterior		
PERFORMANCE			
Max. ambient temp.	40°C		
Temperature range	1°C to 4°C (adjustable via SKOPE-connect 1°C to 15°C)		
GEMS class	M1		
GEMS energy consumption	3.37kWh/24h	3.48 kWh/24h	4.55 kWh/24h
GEMS annual running cost	\$369 p.a. (@ \$0.30/kWh)	\$381 p.a. (@ \$0.30/kWh)	\$499 p.a. (@ \$0.30/kWh)
ELECTRICAL			
Electrical safety climate class	5		
Interior side lighting	2 x 1370mm, 15W LED	2 x 1370mm, 15W LED	n.a.
Interior shelf lighting	n.a.	n.a.	10 x 505mm, 6W LED
Sign lighting	n.a.	1 x 1200mm, 14W LED	1 x 1200mm, 14W LED
Power cord	Supplied with 2.0m, 10 Amp plug and lead		
Power supply	220-240 Volts a.c. 50 Hz, single phase supply		
Current draw	3.0 Amps (includes unit 2.6 Amps)		
REFRIGERATION			
Controller	SCS Connect (SKOPE-connect™ compatible)		
Connectivity interface	Bluetooth® wireless technology		
Refrigeration system	Bottom mounted, integral, removable ActiveCore refrigeration unit (UBHCNI-0008)		
Refrigerant	R290 / 99g (natural refrigerant)		
Nominal capacity	740 Watts		
Heat rejection (Avg/peak)	140 Watts/180 Watts	145 Watts/195 Watts	190 Watts/240 Watts
Drainage	No plumbing required		

DIMENSIONS		
Height	External 2005mm* / 2195mm**	Internal 1454mm
Width	1280mm	1180mm
Depth	795mm	602mm
Floor area	1.08m ²	
Weight	245kg	
Gross volume	1079L	

* Height 2005mm without sign (SKB1200-A)
** Height 2195mm with sign (SKB1200-AC, SKB1200-ACX)
*** Depth 745mm excludes removable door handle, door lock bracket and rear stand-off

Dimensional tolerances		
Before installing this cabinet allow the following dimensional tolerances:		
Linear dimensions	Overall cabinet dimensions	
Less than 1 metre	±5mm	
More than 1 metre	-5mm to +10mm	
Length of multiple cabinets		
	At each joint	At each end wall
Less than 1 metre	±5mm	+15mm
More than 1 metre	-5mm to +10mm	+15mm

Ventilation requirements	
Top	50mm
Sides	Not required
Back	50mm
Bottom	50mm

SKOPE Industries Limited reserve the right to alter specifications without notice. Copyright © 2018 SKOPE Industries Limited

SKOPE INDUSTRIES LIMITED

Australian Freephone: 1800 121 535, New Zealand Freephone: 0800 947 5673

Email: skope@skope.com, Website: www.skope.com

PSS0573 Rev. 2.1 Aug. 2020

