

# specifications


## RF8.CBR.2.4D

ReFlex Series, 4 Drawer, Chef Base Fridge



Project: \_\_\_\_\_

Item No: \_\_\_\_\_

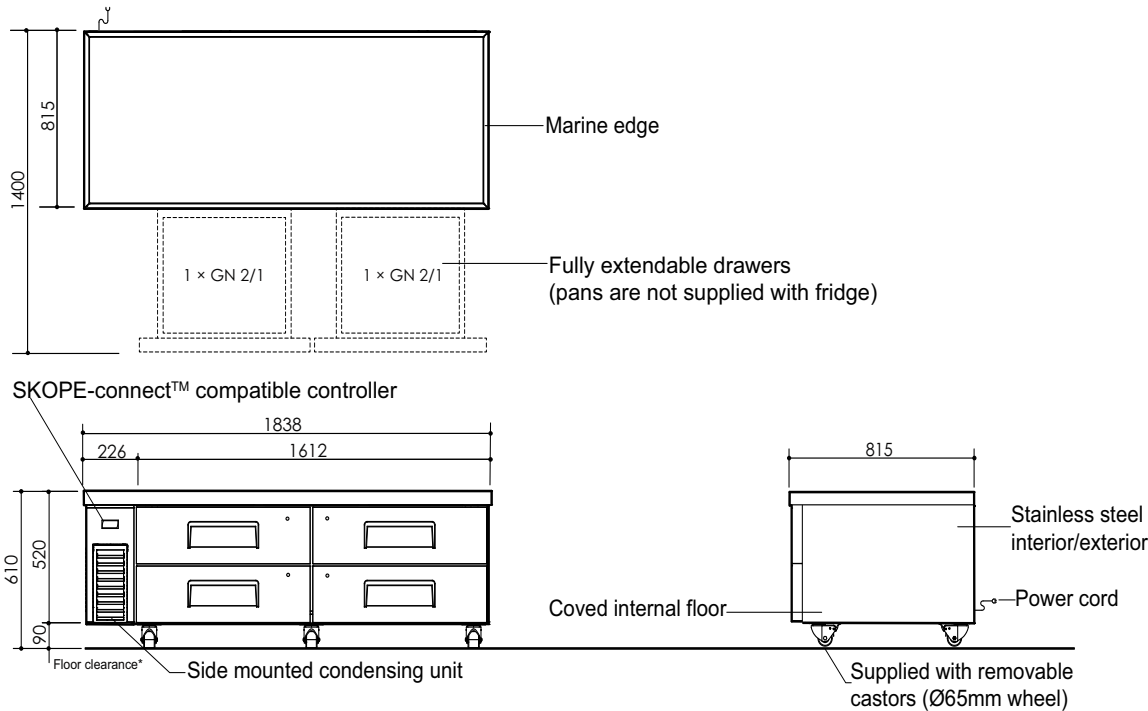

CABINET	
Drawers	4 x fully extendable, refrigerated, stainless steel drawers with individual key locks. 2 bank of full drawers including stainless steel sheet base and sides. Each drawer fits 1xGN 2/1, 100mm deep pan (not supplied with fridge).
Shelves	n.a.
Worktop	Total thickness 45mm (0.7mm 304 AISI stainless steel over heat shield and insulating cyclopentane foamed core)
Material	304 AISI stainless steel interior and exterior
PERFORMANCE	
Max. ambient temp.	40°C
Temperature range	1°C to 4°C (adjustable with SKOPE-connect 0°C to 10°C)
GEMS class	5M1
GEMS energy consumption	4.40 kWh/24h
GEMS annual running cost	\$482 p.a. (@ \$0.30/kWh)
ELECTRICAL	
Electrical safety climate class	5
Interior lighting	n.a.
Power cord	Supplied with 2.6m, 10 Amp plug and lead
Power supply	220-240 Volts a.c. 50 Hz, single phase supply
Current draw	1.8 Amps
REFRIGERATION	
Controller	SCS Connect (SKOPE-connect™ compatible)
Connectivity interface	Bluetooth® wireless technology
Refrigeration system	Built-in, integral refrigeration system with side mounted condensing unit
Refrigerant	R290 / 100g (natural refrigerant)
Nominal capacity	650 Watts
Heat rejection (Avg/peak)	185 Watts/190 Watts
Drainage	No plumbing required

DIMENSIONS		
	External	Internal
Height	600mm*	379mm
Width	1838mm	1510mm
Depth	815mm	649mm
Floor area	1.50m <sup>2</sup>	
Weight	160kg	
Gross volume	371L	
Net volume	118L	

\* With supplied castors fitted and excluding marine edge. See height variation below.

Height variation	
Supplied castors	610mm
Supplied castors and excluding marine edge	600mm
No castors	520mm

Dimensional tolerances		
Before installing this cabinet allow the following dimensional tolerances:		
Linear dimensions	Overall cabinet dimensions	
Less than 1 metre	±5mm	
More than 1 metre	-5mm to +10mm	
	Length of multiple cabinets	
	At each joint	At each end wall
Less than 1 metre	±5mm	+15mm
More than 1 metre	-5mm to +10mm	+15mm

Ventilation requirements	
Top	300mm
Sides	100mm for left side only
Back	Not required
Bottom	Not required

SKOPE Industries Limited reserves the right to alter specifications without notice. Copyright © 2021

### SKOPE INDUSTRIES LIMITED

Australian Freephone: 1800 121 535, New Zealand Freephone: 0800 947 5673  
Email: skope@skope.com, Website: www.skope.com

PSS0687 Rev. 1.2 Jul. 2021

