


specifications

TMF650N-A Series

ActiveCore Series, 1 Door (Glass), Upright Freezer

Project: _____
 Item No: _____

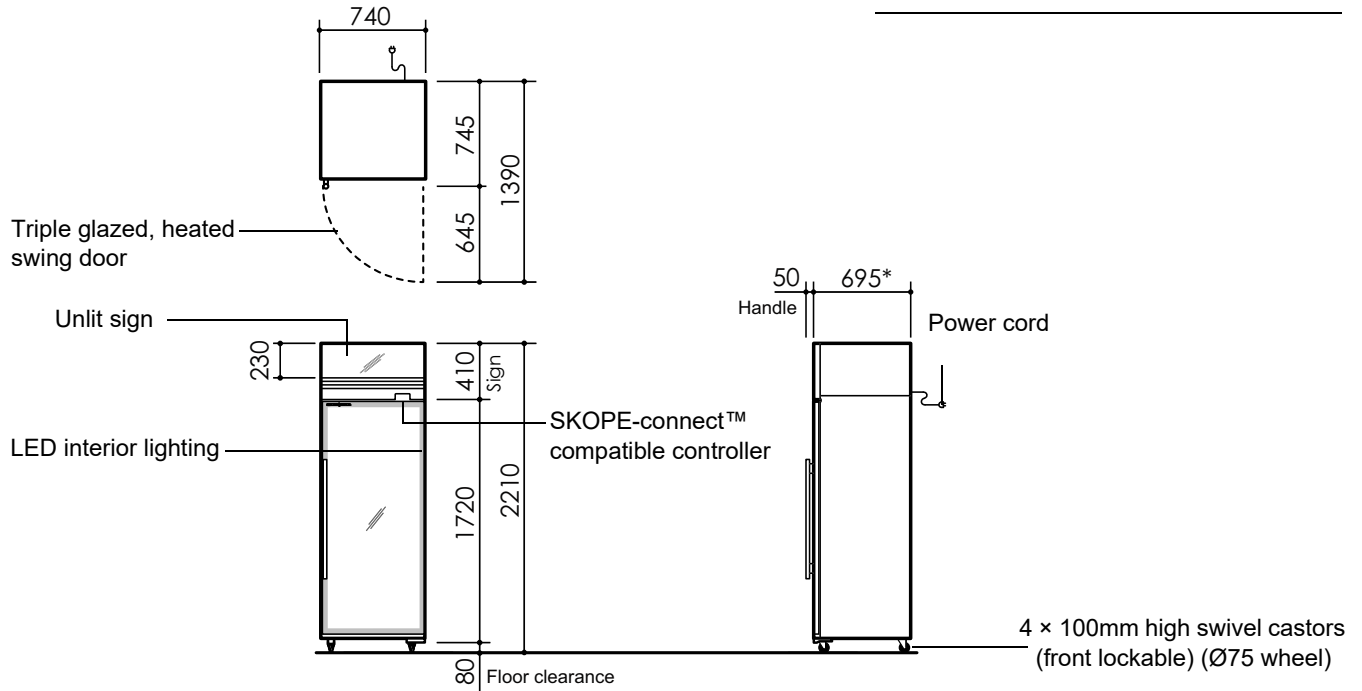

| CABINET | |
|---------------------------------|---|
| Door | 1 × self-closing, triple glazed, single Low-E film, heated, lockable, argon filled, toughened safety glass swing door (hinged RH) |
| Internal door opening | 1 × door openings: 1570mm high × 620mm wide |
| Shelves | 5 × adjustable height wire shelves: 625mm wide × 470mm deep |
| Sign | Unlit |
| Material | Powdercoat galvanised steel |
| PERFORMANCE | |
| Max. ambient temp. | 40°C |
| Temperature range | -21°C to -18°C (adjustable with SKOPE-connect™ -26°C to -12°C) |
| Noise measurement | Standard: ≤63.5 dB(A) Hush Mode: ≤61.5 dB(A) |
| GEMS class | L1 |
| GEMS energy consumption | 10.47 kWh/24h |
| GEMS annual running cost | \$1,146 p.a. (@ \$0.30/kWh) |
| ELECTRICAL | |
| Electrical safety climate class | 5 |
| Interior side lighting | 1 × 1400mm, 15W LED |
| Power cord | Supplied with 10 Amp plug and 2.3m lead |
| Power supply | 220-240 Volts a.c. 50 Hz, single phase supply |
| Current draw | 5.5 Amps (includes unit 3.5 Amps) |
| REFRIGERATION | |
| Controller | SCS Connect (SKOPE-connect™ compatible) |
| Connectivity interface | Bluetooth |
| Refrigeration system | Top mounted, integral, removable ActiveCore freezer cartridge (UTHDNI-0043) |
| Refrigerant | R290 / 107g (natural refrigerant) |
| Nominal capacity | 920 Watts (4500rpm) |
| Heat rejection (Avg./Peak) | 440 Watts/520 Watts |
| Drainage | No plumbing required |

| DIMENSIONS | | |
|------------|--------------------|-----------------|
| Height | External 2210mm | Internal 1570mm |
| Width | 740mm | 640mm |
| Depth | 745mm | 554mm |
| Floor area | 0.55m ² | |
| Weight | 170kg | |
| Volume | 610L | |

* Depth 695mm excludes removable door handle and door lock bracket

| Dimensional tolerances | | |
|--|-----------------------------|------------------|
| Before installing this cabinet allow the following dimensional tolerances: | | |
| Linear dimensions | Overall cabinet dimensions | |
| Less than 1 metre | ±5mm | |
| More than 1 metre | -5mm to +10mm | |
| | Length of multiple cabinets | |
| | At each joint | At each end wall |
| Less than 1 metre | ±5mm | +15mm |
| More than 1 metre | -5mm to +10mm | +15mm |

| Ventilation requirements | |
|--------------------------|--------------|
| Top | 300mm |
| Sides | Not required |
| Back | 10mm |
| Bottom | Not required |

SKOPE Industries Limited reserve the right to alter specifications without notice. Copyright © 2021 SKOPE Industries Limited