

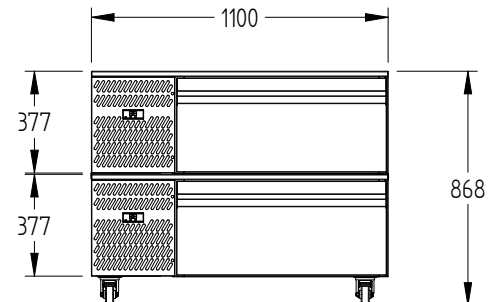


# VSWCD1S



|          |                        |
|----------|------------------------|
| CATEGORY | HYDROCARBON            |
| RANGE    | <b>Varitemp Drawer</b> |
| UNIT     | REFRIGERATOR/FREEZER   |
| TYPE     | SELF CONTAINED         |
| DRAWERS  | 2                      |

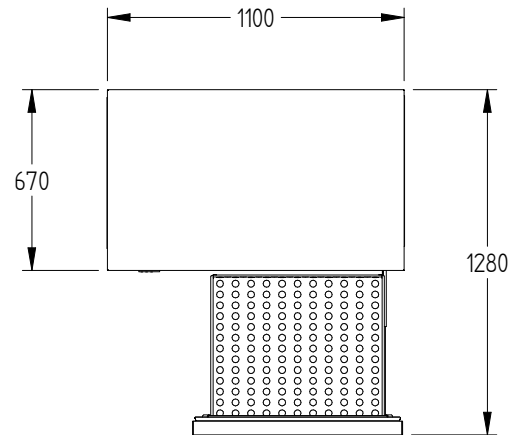

## SPECIFICATIONS

|  |                        |
|--|------------------------|
| CAPACITY 1/1 GN PAN (150 MM DEEP)      | 4                      |
| TEMPERATURE - VARIABLE                 | 1°C / -22°C            |
| DIMENSIONS - W X D X H (ON CASTORS) MM | 1100 W x 670 D x 838 H |
| WEIGHT UNPACKED (KG)                   | 400                    |

## STANDARD INCLUSIONS

|   |                      |
|---|----------------------|
| DRAWERS   | 2                    |
| FINISH (INTERIOR AND EXTERIOR EXCLUDING REAR AND UNDER) | SS (Stainless Steel) |

## GAS TYPE

|             |      |
|-------------|------|
| REFRIGERANT | R290 |
|-------------|------|

## ELECTRICAL

|                                      |            |
|--------------------------------------|------------|
| POWER SUPPLY PER UNIT                | 10 amp X 2 |
| POWER CABLE LENGTH PER UNIT (METRES) | 2          |
| RUNNING AMPS PER UNIT                | 1.89       |

## PERFORMANCE

|                             |                         |
|-----------------------------|-------------------------|
| KWH/24HR READING - PER UNIT | 4.7                     |
| TEST STANDARD               | EN 16825 (Professional) |
| TEST CONDITIONS             | 4 M1                    |
| AMBIENT RATING              | 43°C                    |