# FROFESSIONAL

Modular Cooking Range Line 700XP 2 Hot Plate Electric Infrared Cooking Top Range



371024 (E7IRED2000)

2-zone (2,2 kW each) Infrared Cooking Top

371133 (E7IRED200N)

2-zone (2,2 kW each) Infrared Cooking Top

## **Short Form Specification**

#### Item No.

Ceramic glass top cooking surface 6 mm thick, lying flush to the stainless steel frame for smooth pan movement and easier cleaning. Completely sealed infrared cooking top surface to prevent liquid infiltration. Exterior panels in stainless steel with Scotch Brite finish. One piece pressed work top in 1.5 mm thick stainless steel. Right-angled side edges to allow flush-fitting junction between units.

TEM #	
MODEL #	
NAME #	
SIS #	
AIA #	

#### **Main Features**

- Ceramic glass top cooking surface with 2 infrared heating zones 6 mm thick.
- The circular concentric heating sections measuring 230 mm give uniform heat also to the largest pan.
- The cooking top is sealed to prevent infiltration inside the unit.
- Warning light to indicate residual surface heat.
- Immediate heat transfer from cooking top to pan.
- Low heat dissipation to the kitchen.
- Energy regulation of each zone.
- Heating via ultra high powered heating elements.
- The smooth glass-ceramic surface can be quickly and easily cleaned, thus providing maximum hygiene.
- IPx4 water protection.

#### Construction

- All exterior panels in Stainless Steel with Scotch Brite finishing.
- One piece pressed 1.5 mm work top in Stainless steel.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.

ROFESSIONA

#### APPROVAL:



\_\_\_\_\_



## **Optional Accessories**


Junction sealing kit	PNC 206086
<ul> <li>Support for bridge type installation, 800mm</li> </ul>	PNC 206137
<ul> <li>Support for bridge type installation, 1000mm</li> </ul>	PNC 206138
<ul> <li>Support for bridge type installation, 1200mm</li> </ul>	PNC 206139
<ul> <li>Support for bridge type installation, 1400mm</li> </ul>	PNC 206140
<ul> <li>Support for bridge type installation, 1600mm</li> </ul>	PNC 206141 🗅
<ul> <li>Support for bridge type installation, 400mm</li> </ul>	PNC 206154
<ul> <li>Water column with swivel arm (water column extension not included)</li> </ul>	PNC 206289
Water column extension for 700 line	PNC 206291
<ul> <li>Chimney upstand, 400mm</li> </ul>	PNC 206303
Right and left side handrails	PNC 206307
• Back handrail 800mm, Marine	PNC 206308
• Chimney grid net, 400mm (700XP/900)	PNC 206400
• Frontal handrail, 400mm	PNC 216046
• Frontal handrail, 800mm	PNC 216047
• Frontal handrail, 1200mm	PNC 216049
• Frontal handrail, 1600mm	PNC 216050
<ul> <li>Large handrail - portioning shelf, 400mm</li> </ul>	PNC 216185 🗅
<ul> <li>Large handrail - portioning shelf, 800mm</li> </ul>	PNC 216186 🗅
<ul> <li>2 side covering panels for top appliances</li> </ul>	PNC 216277 🗅



The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

# Electrolux PROFESSIONAL

### Modular Cooking Range Line 700XP 2 Hot Plate Electric Infrared Cooking Top Range

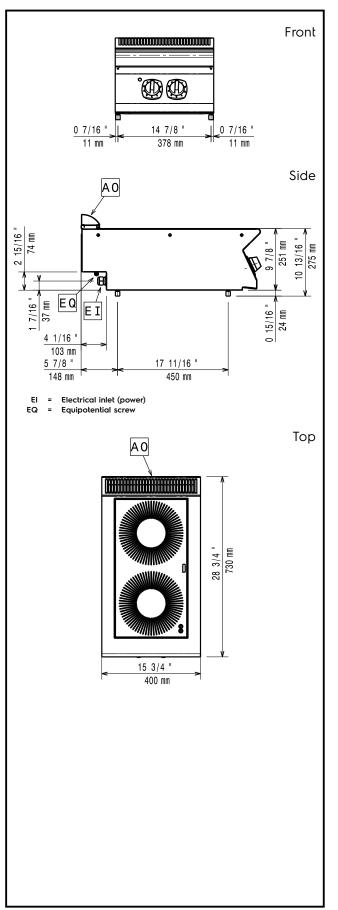

Electric	
Supply voltage: 371024 (E7IRED2000) 371133 (E7IRED200N) Total Watts: Predisposed for:	380-400 V/3N ph/50/60 Hz 230 V/3 ph/50/60 Hz 4.4 kW
371024 (E7IRED2000)	380-400V 3N~ 50/60Hz 3,7-4,4kW
Key Information:	
Front Plates Power: Back Plates Power: Front Plates dimensions: Back Plates dimensions: External dimensions, Width: External dimensions, Depth: Net weight: 371024 (E7IRED2000) 371133 (E7IRED2000) Shipping weight: 371024 (E7IRED2000) 371133 (E7IRED2000)	2.2 - 0 kW 2.2 - kW Ø 230 Ø 230 400 mm 250 mm 730 mm 22 kg 15 kg 26 kg 27 kg
Shipping height: 371024 (E7IRED2000) 371133 (E7IRED200N) Shipping width: 371024 (E7IRED2000) 371133 (E7IRED2000) Shipping depth: Shipping volume: 371024 (E7IRED2000) 371133 (E7IRED200N)	530 mm 540 mm 460 mm 500 mm 820 mm 0.2 m <sup>3</sup> 0.22 m <sup>3</sup>
If appliance is set up or next to	

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.

Certification group:	
371024 (E7IRED2000)	N7CIE
371133 (E7IRED200N)	NIR74

Modular Cooking Range Line 700XP 2 Hot Plate Electric Infrared Cooking Top Range

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.