

## Modular Cooking Range Line 900XP Half Module Electric Grill

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



391270 (E9GREDGCFU)

 Half module electric Grill  
 free standing

### Short Form Specification

Item No. \_\_\_\_\_

Heating via incoloy armoured heating elements positioned under the cooking grid. Cooking surface grids in enameled cast iron, easily removable for cleaning. Includes drip tray for the collection of grease and fat. Exterior panels of unit in stainless steel with Scotch Brite finish. Extra strength work top in heavy duty 2 mm stainless steel. Right-angled side edges to allow flush-fitting junction between units.

### Main Features

- Incoloy armoured heating elements positioned under the cooking grid.
- Each bank of elements has a temperature controlled thermostat.
- Power indicator light.
- Drip tray to collect residual cooking juices and fat.
- Stainless steel high splash guards on the rear and sides of cooking surface. Splash guards can be easily removed for cleaning and are dishwasher-safe.
- The special design of the control knob system guarantees against water infiltration.
- IPX5 water protection.
- Energy regulation through a control knob.
- Heating element can be tilted frontally for easy cleaning.
- Monoblock structure gives better stability and easier installation.
- The cooking surface is double-sided: one for meat and the other for fish and vegetables.
- The drawer can be filled with water to obtain vapor to cook softer food and to facilitate the cleaning of the drawer.
- The low temperature of the external panels allow to work in safety.
- Cooking grids made in highly resistant enameled cast iron for easy cleaning.

### Construction

- Unit is 930 mm deep to give a larger working surface area.
- All exterior panels in Stainless Steel with Scotch Brite finishing.
- AISI 304 stainless steel worktop, 2mm thick.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.

### Optional Accessories

- Junction sealing kit PNC 206086
- Kit 4 wheels - 2 swivelling with brake - it is mandatory to install Base support and wheels PNC 206135
- Flanged feet kit PNC 206136
- Frontal kicking strip for concrete installation, 400mm PNC 206147
- Frontal kicking strip for concrete installation, 800mm PNC 206148
- Frontal kicking strip for concrete installation, 1000mm PNC 206150


APPROVAL: \_\_\_\_\_




- |   |                                     |   |                                     |
|---|-------------------------------------|---|-------------------------------------|
| • Frontal kicking strip for concrete installation, 1200mm                               | PNC 206151 <input type="checkbox"/> | • Frontal handrail, 1200mm                            | PNC 216049 <input type="checkbox"/> |
| • Frontal kicking strip for concrete installation, 1600mm                               | PNC 206152 <input type="checkbox"/> | • Frontal handrail, 1600mm                            | PNC 216050 <input type="checkbox"/> |
| • Pair of side kicking strips for concrete installation                                 | PNC 206157 <input type="checkbox"/> | • 2 side covering panels for free standing appliances | PNC 216134 <input type="checkbox"/> |
| • Frontal kicking strip, 400mm (not for refr-freezer base)                              | PNC 206175 <input type="checkbox"/> | • Large handrail - portioning shelf, 400mm            | PNC 216185 <input type="checkbox"/> |
| • Frontal kicking strip, 800mm (not for refr-freezer base)                              | PNC 206176 <input type="checkbox"/> | • Large handrail - portioning shelf, 800mm            | PNC 216186 <input type="checkbox"/> |
| • Frontal kicking strip, 1000mm (not for refr-freezer base)                             | PNC 206177 <input type="checkbox"/> |   |                                     |
| • Frontal kicking strip, 1200mm (not for refr-freezer base)                             | PNC 206178 <input type="checkbox"/> |   |                                     |
| • Frontal kicking strip, 1600mm (not for refr-freezer base)                             | PNC 206179 <input type="checkbox"/> |   |                                     |
| • Pair of side kicking strips (not for refr-freezer base)                               | PNC 206180 <input type="checkbox"/> |   |                                     |
| • 2 panels for service duct for single installation                                     | PNC 206181 <input type="checkbox"/> |   |                                     |
| • 2 panels for service duct for back to back installation                               | PNC 206202 <input type="checkbox"/> |   |                                     |
| • Kit 4 feet for concrete installation (not for 900 line free standing grill)           | PNC 206210 <input type="checkbox"/> |   |                                     |
| • Water filling tap for free standing grills (1 per each drawer)                        | PNC 206280 <input type="checkbox"/> |   |                                     |
| • Chimney upstand, 400mm  | PNC 206303 <input type="checkbox"/> |   |                                     |
| • Back handrail 800mm, Marine   | PNC 206308 <input type="checkbox"/> |   |                                     |
| • Back handrail 1200mm, Marine  | PNC 206309 <input type="checkbox"/> |   |                                     |
| • Base support for feet or wheels - 400mm (700/900)                                     | PNC 206366 <input type="checkbox"/> |   |                                     |
| • Base support for feet or wheels - 800mm (700/900)                                     | PNC 206367 <input type="checkbox"/> |   |                                     |
| • Base support for feet or wheels - 1200mm (700/900)                                    | PNC 206368 <input type="checkbox"/> |   |                                     |
| • Base support for feet or wheels - 1600mm (700/900)                                    | PNC 206369 <input type="checkbox"/> |   |                                     |
| • Base support for feet or wheels - 2000mm (700/900)                                    | PNC 206370 <input type="checkbox"/> |   |                                     |
| • Rear paneling - 600mm (700/900XP)   | PNC 206373 <input type="checkbox"/> |   |                                     |
| • Rear paneling - 800mm (700/900)   | PNC 206374 <input type="checkbox"/> |   |                                     |
| • Rear paneling - 1000mm (700/900)  | PNC 206375 <input type="checkbox"/> |   |                                     |
| • Rear paneling - 1200mm (700/900)  | PNC 206376 <input type="checkbox"/> |   |                                     |
| • Stainless steel grid with drainage channels for free standing V-shaped grills (900XP) | PNC 206409 <input type="checkbox"/> |   |                                     |
| • Scraper for grids with drainage channels - top grills                                 | PNC 206421 <input type="checkbox"/> |   |                                     |
| • Scraper for free standing grills  | PNC 206422 <input type="checkbox"/> |   |                                     |
| • Base support for feet/wheels (600mm)  | PNC 206431 <input type="checkbox"/> |   |                                     |
| • Side handrail-right/left hand (900XP)   | PNC 216044 <input type="checkbox"/> |   |                                     |
| • Frontal handrail, 400mm   | PNC 216046 <input type="checkbox"/> |   |                                     |
| • Frontal handrail, 800mm   | PNC 216047 <input type="checkbox"/> |   |                                     |



Front

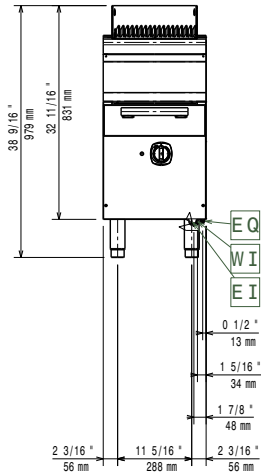


Side

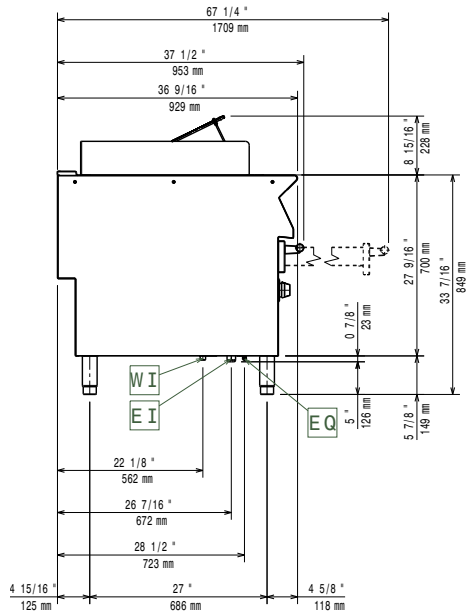

EI = Electrical inlet (power)  
 EQ = Equipotential screw

Top

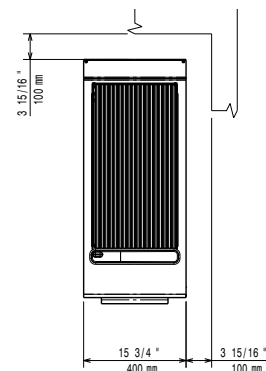

## Electric

|                        |                     |                                   |
|------------------------|---------------------|-----------------------------------|
| Supply voltage:        | 391270 (E9GREDGCFU) | 380-400 V/3N ph/50/60 Hz          |
| Electrical power max.: |                     | 7.5 kW                            |
| Total Watts:           |                     | 7.5 kW                            |
| Predisposed for:       |                     | 380-400V 3N~ 50/60Hz<br>6,7-7,5kW |

## Key Information:

|                              |                     |
|------------------------------|---------------------|
| Cooking surface width:       | 316 mm              |
| Cooking surface depth:       | 640 mm              |
| External dimensions, Width:  | 400 mm              |
| External dimensions, Height: | 850 mm              |
| External dimensions, Depth:  | 930 mm              |
| Net weight:                  | 60 kg               |
| Shipping weight:             | 74 kg               |
| Shipping height:             | 1180 mm             |
| Shipping width:              | 480 mm              |
| Shipping depth:              | 1020 mm             |
| Shipping volume:             | 0.58 m <sup>3</sup> |
| Certification group:         | N9GE                |

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.