
specifications



PG100HFr-2

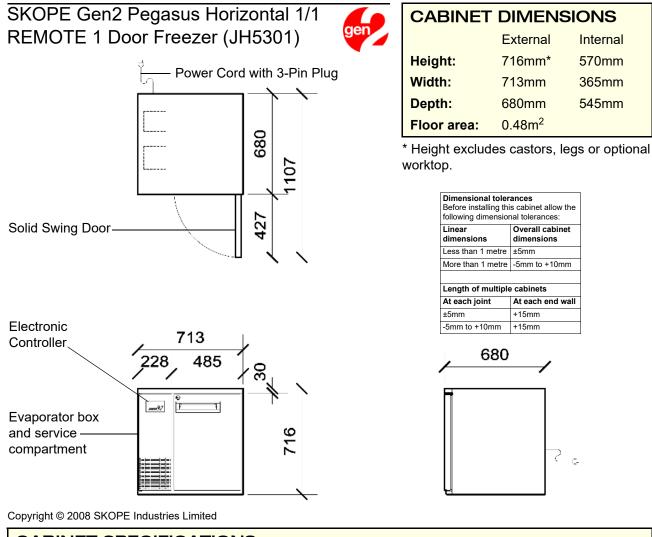

CABINET SPECIFICATIONS	
Refrigeration system:	Electronic controlled, side mounted, remote refrigeration unit
Refrigerant:	Thermostatic expansion valve fitted as standard to suit R404A/R452A
Pipe connection size:	Liquid line: 1/4". Suction line: 3/8"
Remote refrigeration duty:	230 Watts
Cabinet internal volume:	110 litres
Insulation:	60mm thick, high density cyclo-isopentane polyurethane foam
Cabinet temperature range:	-18°C to -21°C up to 43°C ambient
Drainage:	Evaporator drain fitted inside service compartment (requires plumbing)
Electrical:	230-240 Volts a.c. 50 Hz, 3.47 Amps
Internal lighting:	1 x 5W T8 LED tube (Ø26 x 360mm) - Door activated
Internal door opening size:	1 door opening: 570mm high x 365mm wide
Door:	Solid stainless steel, self-closing door (with key lock) - RH hinged
Worktop (optional):	Optional 35mm stainless steel worktop with 65mm square edged fascia
Shelves:	Two levels of non-tip, adjustable tray slides and/or shelves per door
Weight:	100 kg

SKOPE Industries Limited reserve the right to alter specifications without notice.

PSS0184 Rev 2.2 Nov. 2019



SKOPE INDUSTRIES LIMITED

New Zealand Freephone: 0800 947 5673, Fax: (03) 983 3896. Australian Freephone: 1800 121 535, Freefax: 1800 121 533 Email: enquiry@skope.co.nz Website: www.skope.co.nz