
specifications

PG200HFr



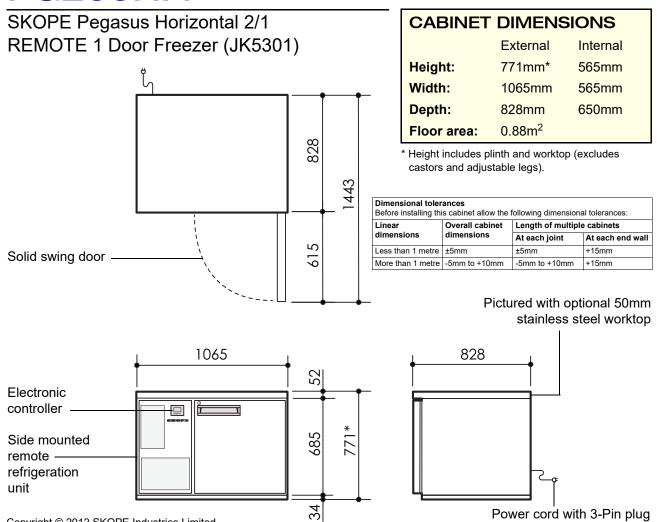

Copyright © 2012 SKOPE Industries Limited

CABINET SPECIFICATIONS

Refrigeration system:	Electronic controlled, side mounted, remote refrigeration unit
Refrigerant:	Thermostatic expansion valve fitted as standard to suit R404A/R452A
Pipe connection size:	Liquid line: 1/4". Suction line: 3/8"
Remote refrigeration duty:	180 Watts @ -30°C SST
Cabinet internal volume:	210 litres
Insulation:	60mm thick, high density cyclo-isopentane polyurethane foam
Cabinet temperature range:	-18°C to -21°C up to 43°C ambient
Drainage:	Evaporator drain fitted inside service compartment (requires plumbing)
Electrical:	230-240 Volts a.c. 50 Hz, 1.60 Amps
Internal lighting:	n.a.
Internal door opening size:	1 door opening: 565mm high x 565mm wide
Door:	Solid stainless steel, self-closing door (with key lock) - RH hinged
Worktop (optional):	Optional 50mm square edged stainless steel worktop
Shelves:	Two levels of non-tip, adjustable tray slides and/or shelves per door
Weight:	108 kg

SKOPE Industries Limited reserve the right to alter specifications without notice.

PSS0296 Rev 2.3 Nov. 2019



SKOPE INDUSTRIES LIMITED

New Zealand Freephone: 0800 947 5673, Fax: (03) 983 3896. Australian Freephone: 1800 121 535, Freefax: 1800 121 533 Email: enquiry@skope.co.nz Website: www.skope.co.nz