

Technical data sheet for

## E32D4 OVEN / VH32 VENTLESS HOOD ON THE SK32 STAND

Full Size Digital / Electric Convection Oven with  
**Halton** Ventless Condensing Hood on a Stainless Steel Stand



### E32D4

Unit shall be a Moffat electrically heated Turbofan Convection Oven. The oven shall have a one piece vitreous enamel oven chamber, stainless top and sides and safe touch vented easy clean side hinged door that offers field reversible hinging. Oven shall have capacity for four full size sheet pans. The oven shall be controlled by an electronic control having separate digital displays and adjusting knobs for time and temperature functions. The oven control shall allow both manual and programmed operating modes with programmable moisture injection, 2 speed oven fan, and 3 stage cooking. A core temperature probe M236060 is optional. The unit shall include dual halogen oven lamps. Oven shall be able to be bench mounted on 76mm feet or mounted on oven stand model SK32. Unit shall be supplied in 100% recyclable shipping packaging. This unit shall be Energy Star certified.

### SK32

Unit shall be a Moffat Turbofan stainless steel oven stand. The stand shall be constructed from stainless steel tube with castors, with front castors having dual swivel and wheel locks. It shall be fitted with 6 tray runners suitable for up to 12 half size sheet pans or 6 full size sheet pans. The stand shall be fully compatible with and support Turbofan Convection Oven models E32D and G32D. Unit shall be supplied in 100% recyclable shipping packaging.

### STANDARD FEATURES

- 4 460mm x 660mm / 18" x 26" full size sheet pan capacity
- 4 400mm x 600mm tray capacity
- 110mm tray spacing
- Compact 735mm width
- Digital display Time and Temperature Controls
- USB port for programs
- 30 programs with 3 stage cooking and stage end alarms
- Core Probe program cooking (optional Core Probe Kit)
- Moisture injection mode (5 levels) and manual injection
- 2 speed bi-directional reversing fan system
- 6.3kW heating power
- Safe-Touch vented side hinged door
- Vitreous enameled oven chamber

### STANDARD FEATURES – VENTLESS CONDENSATION HOOD

- Removes need for installation under canopy or ducted oven hood
- Complies with EPA202 test method for less than <5mg/m<sup>3</sup> grease laden effluent limits
- 3 stage filtering including charcoal odour filter
- Condensing heat exchanger for oven vent condensing and reduced heat emissions
- Self contained condensate collection – no connection to waste drain required
- Oven Hood interlock control
- Automatic 2 speed extraction fans - reduced noise/energy
- SEED certified for installation without an extraction canopy in most situations

### VHIK32 INSTALLATION KIT

- Supplied standard with Hood
- Requires mechanical and electrical field assembly for connection of Hood to Oven

### ACCESSORIES

- Optional M236060 Core Temperature Probe Kit
- Turbofan SK32 Oven Stand
- #H11715 Replacement Charcoal Filter for VH32

### VH32

Unit shall be a Halton Ventless Condensing Hood, UL listed and UL EPH classified. The unit shall have all stainless steel construction, include 3 stage filtration and incorporate a condensing heat exchanger. Unit will feature an automatic 2 speed extraction fan with interlocked oven operation, Unit shall be 220-240V and fitted with a 10A plug cordset. Unit shall be provided with VHIK32 Installation Kit for connection and fitment to Moffat Turbofan Convection Oven models E32D4, E32D5, E32T4, E32T5.

### VHIK32 Installation Kit

Installation Kit shall be provided with VH32 Ventless Condensing Hood. Installation kit shall include: Wire harness for oven interlock connection to oven controls. Four 100mm oven feet and condensate collection pan and housing for self-contained condensate collection. Oven rear shroud for protection of interlock control harness and condensate drain tube. Oven to stand rear securing plate when oven is fitted on a Moffat Turbofan SK32 Stand.

**Halton** VH Series Ventless Condensing Hoods are manufactured by Halton Company, USA, exclusively for Moffat Turbofan Convection Ovens.

### E32D4 Full Size Digital / Electric Convection Oven

#### CONTROLS

Electronic controls with Digital Time and Temperature display, Manual or Program modes  
Moisture injection key (5 levels)  
Thermostat range 50-260°C  
Timer range from 180 minutes in countdown mode  
Timer range up to 999 minutes in time count mode for holding, slow cooking  
Optional Core Probe temperature range 50-90°C

#### SPECIFICATIONS

Electrical Requirements  
230-240V, 50Hz, 1P+N+E, 6.5kW, 27A  
No cordset supplied

#### Water Requirements (optional)

Cold water connection 3/4" BSP male  
80psi maximum inlet pressure / 20psi minimum inlet pressure

#### External Dimensions (E32D4)

Width 735mm  
Height 730mm including 76mm feet  
Depth 810mm

#### Oven Rack Dimensions

Width 460mm  
Depth 660mm

#### Nett Weight (E32D4)

89kg

#### Packing Data (E32D4)

105kg  
0.57m<sup>3</sup>  
Width 760mm  
Height 815mm  
Depth 925mm

### VH32 Ventless Condensing Hood

Including VHIK32 Installation Kit

#### CONTROLS

Illuminated Power switch  
Oven interlocked control

#### SPECIFICATIONS

Electrical Requirements  
220-240V, 50-60hz, 1-phase, 1.0A  
10A plug 1.8M cordset fitted

#### Water Requirements

No water connection required

#### Drain Requirements – Optional

Hood water condensate can be taken to a water waste drain if desired. A 1800mm long 3/8" OD drain hose is supplied with hood.

#### External Dimensions (VH32 Ventless Hood)

Width: 742mm  
Height: 368mm  
Depth: 1017mm  
Allow 76mm rear clearance

#### Nett Weight (VH32 Ventless Hood)

46.5 kg

#### Packing Data (VH32 Ventless Hood)

57 kg  
0.7 m<sup>3</sup>  
Width 800mm  
Height 545mm  
Depth 1120mm

### SK32 Stainless Steel Stand

All stainless steel welded frame oven stand for Turbofan E32D,

E32T and G32D Series ovens

6 position tray runners standard  
76mm diameter wheel swivel castors standard with 2 front castors with dual swivel and wheel  
Supplied CKD for assembly on site

#### External Dimensions (SK32 Oven Stand)

Width 735mm  
Height 880mm  
Depth 827mm

#### Nett Weight (SK32 Oven Stand)

18.5kg

#### Packing Data (SK32 Oven Stand)

23kg  
0.14m<sup>3</sup>  
Width 840mm  
Height 805mm  
Depth 210mm

#### INSTALLATION CLEARANCES

Rear 50mm  
LH Side 50mm  
RH Side\* 75mm

\* For fixed installations a minimum of 500mm is required for service

#### CLEARANCE FROM SOURCES OF HEAT

A minimum distance of 300mm from the appliance sides is required



Australia  
www.moffat.com.au  
New Zealand  
www.moffat.co.nz  
www.turbofanoven.com

Australia  
Moffat Pty Limited

Victoria/Tasmania  
740 Springvale Road  
Mulgrave, Victoria 3170  
Telephone +61 3-9518 3888  
Facsimile +61 3-9518 3833  
vsales@moffat.com.au

New South Wales  
Telephone +61 2-8833 4111  
nswsales@moffat.com.au

South Australia  
Telephone +61 3-9518 3888  
vsales@moffat.com.au


Queensland  
Telephone +61 7-3630 8600  
qldsales@moffat.com.au

Western Australia  
Telephone +61 8-9413 2400  
wasales@moffat.com.au

New Zealand  
Moffat Limited

Christchurch  
45 Illinois Drive  
Izone Business Hub  
Rolleston 7675  
Telephone +64 3-983 6600  
Facsimile +64 3-983 6660  
sales@moffat.co.nz

Auckland  
Telephone +64 9-574 3150  
sales@moffat.co.nz

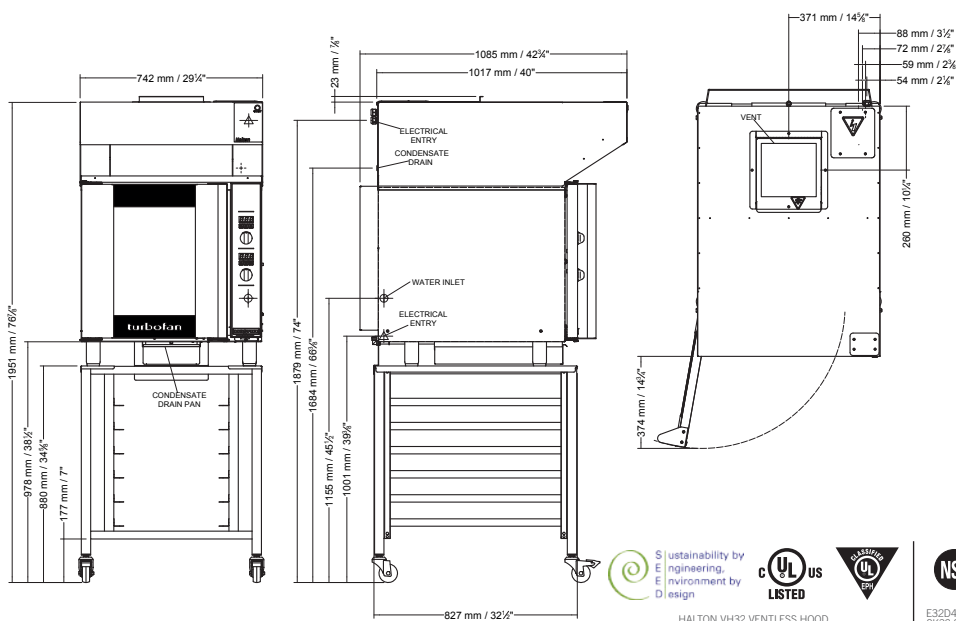

Designed and manufactured by  
**MOFFAT**

ISO9001  
All Turbofan products are designed and manufactured by Moffat using the internationally recognised ISO9001 quality management system, covering design, manufacture and final inspection, ensuring consistent high quality at all times.

In line with policy to continually develop and improve its products, Moffat Limited reserves the right to change specifications and design without notice.

© Copyright Moffat Ltd  
AN.TFN.S.2201



an Ali Group Company



The Spirit of Excellence