30TSERIES



E33T5

Technical data sheet for

E33T5 ON THE SK33 STAND

1/1 GN Electric Convection Oven TOUCH SCREEN CONTROL on a Stainless Steel Stand



F33T5 OVEN





E33T5

Unit shall be a Moffat electrically heated Turbofan convection oven. The oven shall have a one piece vitreous enamel oven chamber, stainless exterior top and sides. The oven shall have a vented safe touch side hinged door with slam shut latching and pendulum operation door handle. Oven shall have capacity for 5 half size sheet pans or 5 1/1 GN pans. The oven shall have selectable moisture level injection and a 2 speed oven fan. The oven shall be controlled by a 5.7" Touch Screen control with manual and recipe operating modes with icon driven recipe programs and individual shelf control operation mode and multiple stage cooking. Oven controller shall have USB port for recipe file uploading and downloading. A core temperature probe M236060 is optional. The oven shall include dual halogen oven lamps. The oven shall be able to be bench mounted on 76mm feet or mounted on oven stand model SK33. Unit shall be supplied in 100% recyclable shipping packaging. This unit shall be Energy Star certified.

SK33

Unit shall be a Moffat Turbofan stainless steel oven stand. The stand shall be constructed from stainless steel tube with castors, with front castors having dual swivel and wheel locks. It shall be fitted with 5 tray runners suitable for up to 5 1/1 GN pans. The stand shall be fully compatible with, and support, Turbofan Convection Oven models E33D5 and E33T5. Unit shall be supplied in 100% recyclable shipping packaging.

STANDARD FEATURES

- 5 1/1 GN Gastronorm tray capacity
- 85mm tray spacing
- Compact 610mm width
- Touch Screen control
- Program and Manual modes
- Icon driven program menu
- Multiple stage cooking
- Individual shelf control and shelf timers
- Auto-Start mode
- Energy Save Set-Back mode
- Straight or Flex cooking time
- Core probe cooking (optional Core probe Kit)
- USB port for program/icon updating
- Moisture Injection mode (5 levels)
- 2 speed bi-directional reversing fan system
- 5.8kW heating power
- Safe-Touch vented side hinged door
- Slam shut door latch
- Pendulum operation door handle
- Vitreous enamel oven chamber
- Push fit continuous oven door seal (no tools)
- Dual halogen oven lamps
- Anti-skid 50mm dia. 76mm high adjustable stainless steel feet
- 100% recyclable packaging

ACCESSORIES

- Optional M236060 Core Temperature Probe Kit
- Turbofan SK33 Oven Stand
- DSK33 Double Stacking Kit



30TSERIES



E33T5

E33T5 1/1 GN Convection Oven TOUCH SCREEN CONTROL

CONSTRUCTION

Vitreous enamel fully welded oven chamber Stainless steel front, sides and top exterior Stainless steel oven fan baffle and oven vent Removable 5 position stainless steel side racks Stainless steel frame side hinged door

5mm thick door outer glass

5mm thick low energy loss door inner glass

Stainless steel control panel

Aluminised coated steel base and rear panels

CONTROLS

5.7" LED backlit touch screen Icon driven program menu BMP image icon imports via USB port Program updates via USB port Temperature range 30 - 260°C Adjustable sounder tones and volume Other specification on request Safety thermostat cut-out Optional core temp probe

CLEANING

Stainless steel top and side exterior panels

Vitreous enamel oven chamber

Fully removable stainless steel oven side racks

Removable stainless steel oven fan baffle

Easy clean door system with hinge out door inner glass

(no tools required)

Removable push fit oven door seal (no tools required) 76mm high stainless steel feet for easy access underside

SPECIFICATIONS

Electrical Requirements

230-240V, 50Hz, 1P+N+E, 6.0kW, 25A

Water Requirements (optional)

Cold water connection 34" BSP male

External Dimensions

Width 610mm

730mm including 76mm feet Height

Depth 680mm

Oven Internal Dimensions

Width 330mm Height 515mm Depth 570mm Volume 0.10m3

Oven Rack Dimensions Width 330mm

Depth 530mm

Nett Weight 71.5kg

Packing Data

Volume

93kg 655mm Width 805mm Height 830mm Depth

SK33 Stainless Steel Stand

All stainless steel welded frame oven stand for Turbofan E33D and E33T Series ovens

5 position tray runners standard

0.44m3

76mm diameter wheel swivel castors standard with 2 front castors with dual swivel and wheel

Welded 38mm and 32mm square tube front and rear frames Welded rack supports/side frames

4 dia. 76mm swivel castors with 2 front castors dual wheel

Supplied CKD for assembly on site

External Dimensions (SK33 Oven Stand)

610mm Width Height 880mm

Nett Weight (SK33 Oven Stand)

18kg

Packing Data (SK33 Oven Stand)

20.5kg

755mm Height 795mm 160mm Depth 0.1m3 Volume

INSTALLATION CLEARANCES

Rear 50mm LH Side RH Side*

* For fixed installations a minimum of 500mm is required

CLEARANCE FROM SOURCES OF HEAT

A minimum distance of 300mm from the appliance sides

is required

MOFFAT

Australia www.moffat.com.au New Zealand www.moffat.co.nz www.turbofanoven.com

Australia Moffat Pty Limited

Victoria/Tasmania 740 Springvale Road Mulgrave, Victoria 3170 Telephone +61 3-9518 3888 Facsimile +61 3-9518 3833 vsales@moffat.com.au

New South Wales Telephone +61 2-8833 4111 nswsales@moffat.com.au

South Australia Telephone +61 3-9518 3888 vsales@moffat.com.au

Queensland Telephone +61 7-3630 8600 qldsales@moffat.com.au

Western Australia Telephone +61 8-9413 2400 wasales@moffat.com.au

New Zealand Moffat Limited

Christchurch 45 Illinois Drive Izone Business Hub Rolleston 7675 Telephone +64 3-983 6600 Facsimile +64 3-983 6660 sales@moffat.co.nz

Auckland

Telephone +64 9-574 3150 sales@moffat.co.nz





ISO9001 Quality Management SGS Standard

Designed and manufactured by




ISO9001

All Turbofan products are designed and manufactured by Moffat using the internationally recognised ISO9001 quality management system, covering design, manufacture and final inspection. ensuring consistent high quality at all times.

In line with policy to continually develop and improve its products, Moffat Limited reserves the right to change specifications and design without notice

Copyright Moffat Ltd AN.TFN.S.1901

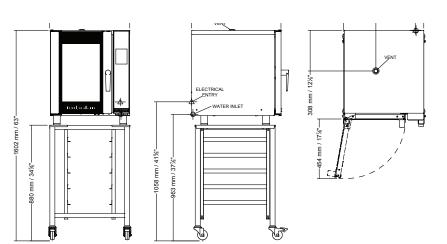



an Ali Group Company

