

Technical data sheet for

E33T5 OVEN / VH33 VENTLESS HOOD ON THE SK33-VH STAND

Half Size Electric Convection Oven TOUCH SCREEN CONTROL with
Halton Ventless Condensing Hood on a Stainless Steel Stand



E33T5 OVEN



E33T5

Unit shall be a Moffat electrically heated Turbofan Convection Oven. The oven shall have a one piece vitreous enamel oven chamber, stainless exterior top and sides. The oven shall have a vented safe touch side hinged door with slam shut latching and pendulum operation door handle. Oven shall have capacity for 5 half size sheet pans or 5 1/1 GN pans. The oven shall have selectable moisture level injection and a 2 speed oven fan. The oven shall be controlled by a 5.7" Touch Screen control with manual and recipe operating modes with icon driven recipe programs and individual shelf control operation mode and multiple stage cooking. Oven controller shall have USB port for recipe file uploading and downloading. A core temperature probe M236060 is optional. The oven shall include dual halogen oven lamps. The oven shall be able to be bench mounted on 76mm feet or mounted on oven stand model SK33-VH. Unit shall be supplied in 100% recyclable shipping packaging. This unit shall be Energy Star certified.

SK33-VH

Unit shall be a Moffat Turbofan stainless steel oven stand. The stand shall be constructed from stainless steel tube with castors, with front castors having dual swivel and wheel locks. It shall be fitted with 5 tray runners suitable for up to 5 1/1 GN pans. The stand shall be fully compatible with and support Turbofan Convection Oven models E33D5 and E33T5. Unit shall be supplied in 100% recyclable shipping packaging.

STANDARD FEATURES - OVEN

- 5 1/1 GN Gastronorm tray capacity
- 85mm tray spacing
- Compact 610mm width
- Touch Screen control
- USB port for programs
- Icon driven program menu
- Core Probe program cooking (optional Core Probe Kit)
- Moisture injection mode (5 levels) and manual injection
- 2 speed bi-directional reversing fan system
- 5.8kW heating power
- Safe-Touch vented side hinged door
- Vitreous enamel oven chamber

STANDARD FEATURES – VENTLESS CONDENSATION HOOD

- Removes need for installation under canopy or ducted oven hood
- Complies with EPA202 test method for less than $5\text{mg}/\text{m}^3$ grease laden effluent limits
- 3 stage filtering including charcoal odour filter
- Condensing heat exchanger for oven vent condensing and reduced heat emissions
- Self contained condensate collection – no connection to waste drain required
- Oven Hood interlock control
- Automatic 2 speed extraction fans - reduced noise/energy
- SEED certified for installation without an extraction canopy in most situations

VH33 INSTALLATION KIT

- Supplied standard with Hood
- Requires mechanical and electrical field assembly for connection of Hood to Oven

ACCESSORIES

- Optional M236060 Core Temperature Probe Kit
- Turbofan SK33-VH Oven Stand
- #H11715 Replacement Charcoal Filter for VH33

VH33

Unit shall be a Halton Ventless Condensing Hood, UL listed and UL EPH classified. The unit shall have all stainless steel construction, include 3 stage filtration and incorporate a condensing heat exchanger. Unit will feature an automatic 2 speed extraction fan with interlocked oven operation, Unit shall be 220-240V and fitted with a 10A plug cordset. Unit shall be provided with VH33 Installation Kit for connection and fitment to Moffat Turbofan Convection Oven models E33D5, E33T5.

VH33 Installation Kit

Installation Kit shall be provided with VH33 Ventless Condensing Hood. Installation kit shall include: Wire harness for oven interlock connection to oven controls. Four 4" (100mm) oven feet and condensate collection pan and housing for self-contained condensate collection. Oven rear shroud for protection of interlock control harness and condensate drain tube. Oven to stand rear securing plate when oven is fitted on a Moffat Turbofan SK33-VH Stand.

Halton VH Series Ventless Condensing Hoods are manufactured by Halton Company, USA, exclusively for Moffat Turbofan Convection Ovens.

E33T5 Half Size Electric Convection Oven TOUCH SCREEN CONTROL

CONTROLS

5.7" LED backlit touch screen
Icon driven program menu
BMP image icon imports via USB port
Program updates via USB port
Temperature range 30 - 260°C
Adjustable sounder tones and volume
Safety thermostat cut-out
Optional core temperature probe

SPECIFICATIONS

Electrical Requirements
230-240V, 50Hz, 1P+N+E, 6.0kW, 25A
No cordset supplied

Water Requirements(optional)

Cold water connection 3/4" BSP male
80psi maximum inlet pressure / 20psi minimum inlet pressure

Oven Rack Dimensions

Width 330mm
Depth 530mm

External Dimensions (E33D5)

Width 610mm
Height 1720mm
Depth 730mm

Nett Weight (E33D5)

71.5kg

Packing Data (E33D5)

205lbs / 93kg
Width 655mm
Height 805mm
Depth 830mm
Volume 0.44m³

VH33 Ventless Condensing Hood

Including VHIK33 Installation Kit

CONTROLS

Illuminated Power switch
Oven interlocked control

SPECIFICATIONS

Electrical Requirements
220-240V, 50-60hz, 1P+N+E, 1.0A
10A plug 1.8M cordset fitted

Water Requirements

No water connection required

Drain Requirements – Optional

Hood water condensate can be taken to a water waste drain if desired. A 1800mm long 3/8"OD drain hose is supplied with hood.

External Dimensions (VH33 Ventless Hood)

Width: 618mm
Height: 367mm
Depth: 889mm
Allow 76mm rear clearance

Nett Weight (VH33 Ventless Hood)

39.0 kg

Packing Data (VH33 Ventless Hood)

50 kg
0.37 m³
Width: 676mm
Height: 545mm
Depth: 1005mm

SK33-VH Stainless Steel Stand

All stainless steel welded frame oven stand for Turbofan E33D and E33T Series ovens
5 position tray runners standard
76mm diameter swivel castors standard with 2 front castors wheel and swivel lock
Supplied CKD for assembly on site

External Dimensions (SK33-VH Oven Stand)

Width 671mm
Height 880mm
Depth 727mm

Nett Weight (SK33-VH Oven Stand)

18kg

Packing Data (SK33-VH Oven Stand)

20.5kg
0.12m³
Width 55mm
Height 795mm
Depth 190mm

INSTALLATION CLEARANCES

Rear 50mm
LH Side 50mm
RH Side* 75mm

* For fixed installations a minimum of 500mm is required for service

CLEARANCE FROM SOURCES OF HEAT

A minimum distance of 300mm from the appliance sides is required



Australia
www.moffat.com.au
New Zealand
www.moffat.co.nz
www.turbofanoven.com

Australia
Moffat Pty Limited

Victoria/Tasmania
740 Springvale Road
Mulgrave, Victoria 3170
Telephone +61 3-9518 3888
Facsimile +61 3-9518 3833
vsales@moffat.com.au

New South Wales
Telephone +61 2-8833 4111
nswsales@moffat.com.au

South Australia
Telephone +61 3-9518 3888
vsales@moffat.com.au

Queensland
Telephone +61 7-3630 8600
qldsales@moffat.com.au

Western Australia
Telephone +61 8-9413 2400
wasales@moffat.com.au

New Zealand
Moffat Limited

Christchurch
45 Illinois Drive
Izone Business Hub
Rolleston 7675
Telephone +64 3-983 6600
Facsimile +64 3-983 6660
sales@moffat.co.nz

Auckland
Telephone +64 9-574 3150
sales@moffat.co.nz




Designed and manufactured by
MOFFAT

ISO9001
All Turbofan products are designed and manufactured by Moffat using the internationally recognised ISO9001 quality management system, covering design, manufacture and final inspection, ensuring consistent high quality at all times.

In line with policy to continually develop and improve its products, Moffat Limited reserves the right to change specifications and design without notice.

© Copyright Moffat Ltd
AN.TFN.S.2201

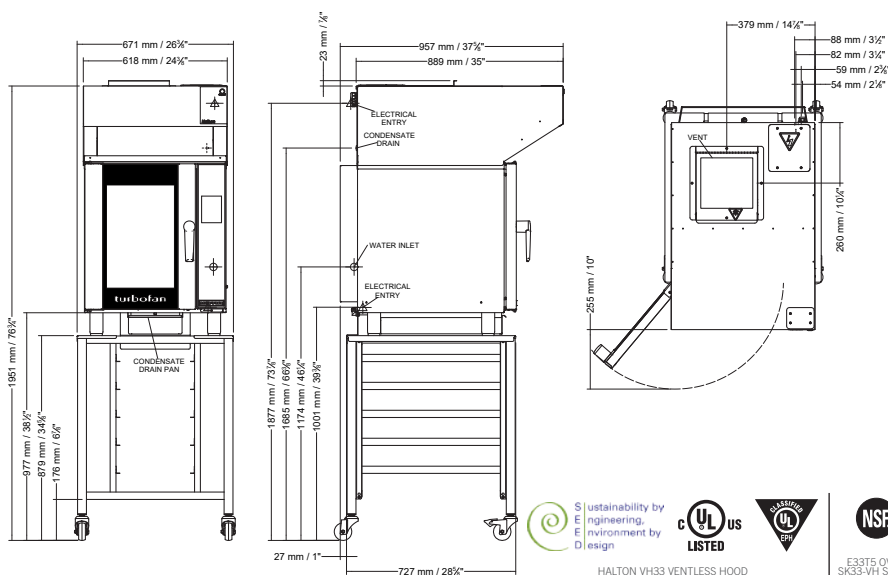

Sustainability by
Engineering,
Environment by
Design



HALTON VH33 VENTLESS HOOD

E33T5 OVEN
SK33-VH STAND
E33T5 OVEN

an Ali Group Company



The Spirit of Excellence