

Technical data sheet for

## FAST FRI SINGLE PAN GAS FRYER 600mm

FN8130G-HPO

---



- 140 MJ/hr continuous production single pan fryer
- High Power Output infra-red burner system
- Easy clean stainless steel open pan with 10 year limited warranty
- 31L oil tank capacity
- 2 large or 3 standard basket capacity
- Large capacity cool zone
- 32mm (1 1/4") drain valve
- Stainless steel exterior
- Easy service
- Fully modular
- Low back model (FNL) available

### Overall Construction

- Stainless steel pan with 10 year limited warranty
- Bull nose welded 1.5mm 304 stainless steel
- Splashback 1.5mm 304 stainless steel
- Side panels 1.2mm 304 stainless steel
- Double skin door with 0.9mm 304 stainless exterior
- 32mm (1 1/4") drain valve
- 150mm legs in 63mm dia. heavy-duty 1.2mm 304 stainless steel with adjustable feet
- 2 large standard baskets and stainless steel lid supplied standard

### Controls – Burner System

- Electronic thermostat
- Large easy use control with easy view scale
- Thermostat range 90 – 195°C
- Over-temperature safety cut-out
- Full electronic ignition system
- Two 70MJ/hr power infra-red burners
- Independent LH and RH burner systems
- Lock-out alarm indicators on front panel

### Cleaning and Servicing

- Open stainless steel pans for easy clean
  - Easy clean basket support bar
  - 32mm (1 1/4") drain valve for effective draining
  - Easy clean stainless steel exterior
  - Access to all parts from front of unit
-

Technical data sheet for

# FAST FRI SINGLE PAN GAS FRYER 600mm



## Specifications

### Production rate

50kg/hr

### Pan Size

Width 515mm

Length 380mm

Oil frying depth 95mm

Oil capacity 31L (46.5lbs shortening)

### Baskets

2 chrome plated large wire baskets

210mm W x 335mm D x 145mm H

Optional 3 chrome plated standard wire baskets

145mm W x 335mm D x 145mm H

Stainless steel perforated basket support plate

### Burners

2 x 70MJ/hr power infra-red burners

### Gas Power

140MJ/hr, 39kW

### Gas connection

R <sup>3</sup>/<sub>4</sub> (BSP) male

300mm from RH side, 35mm from rear,

and 125mm from floor

Optional rear connection

(refer specification drawing)

All units incorporate Natural and LP gas regulator

### Electrical Connection

230-240 Vac, 1P+N+E, 50Hz, 0.5A

3 pin 10A cordset fitted

### DIMENSIONS

Width 600mm

Depth 805mm

Height 915mm

Incl. splashback 1130mm

Incl. low back 1085mm

### NETT WEIGHT

100kg

### PACKING DATA

0.70m<sup>3</sup>, 148kg

Width 870mm

Depth 645mm

Height 1255mm

### GAS TYPES

Available in Natural gas and LP gas

Please specify when ordering

Units supplied complete with gas type

conversion kits

Other gas types on request

### OPTIONS AT EXTRA COST

Waldorf Filtamax filtration system

Fish plates

Extra large baskets

Standard baskets


Side splash guards

Joining caps

Castors

Plinth mounting

FN8130G-HPO

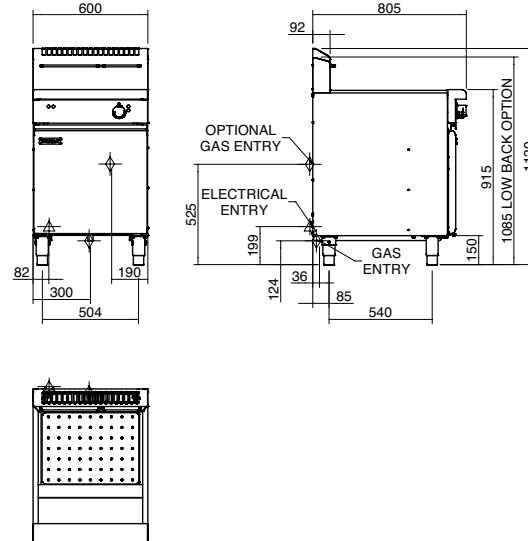

moffat.com.au  
moffat.co.nz

Australia  
moffat.com.au

### Moffat Pty Limited

Victoria/Tasmania  
740 Springvale Road  
Mulgrave, Victoria 3170  
Telephone +613-9518 3888  
Facsimile +613-9518 3833  
vsales@moffat.com.au

New South Wales  
Telephone +612-8833 4111  
nswsales@moffat.com.au

South Australia  
Telephone +613-9518 3888  
vsales@moffat.com.au

Queensland  
Telephone +617-3630 8600  
qldsales@moffat.com.au

Western Australia  
Telephone +618-9413 2400  
wasales@moffat.com.au

### New Zealand

moffat.co.nz

### Moffat Limited

Rolleston  
45 Illinois Drive  
Izone Business Hub  
Rolleston 7675  
Telephone +64 3-983 6600  
Facsimile +64 3-983 6660  
sales@moffat.co.nz

Auckland  
Telephone +64 9-574 3150  
sales@moffat.co.nz



ISO9001  
Quality  
Management  
Standard



Cert. No. 6882

In line with policy to continually develop and improve its products, Moffat Limited reserves the right to change specifications and design without notice.

© Copyright Moffat Ltd  
AN.W8.08/19

an Ali Group Company



The Spirit of Excellence