

## M2

Professional Passthrough Dishwasher – 500mm rack  
**W 705mm x D 720mm x H 1530mm**

The Washtech M2 is a powerful and highly efficient passthrough dishwasher that combines the latest technology with heavy duty stainless steel construction and componentry. With economical water consumption rates and powerful rinse heating, the M2 provides excellent wash results while being light on operating costs and the environment.

The M2's intuitive electronic controls provide Soft Start, EcoPower, cycle customisation, chemical adjustability and immediate fault diagnosis. Capable of fitting into 595-640mm bench gaps, the M2 is the perfect machine for busy restaurants and production kitchens.

Since 1981 Washtech dishwashers have been constructed from heavy-duty stainless steel, and are engineered specifically for Australian conditions and regulations. Backed by the most extensive service network and spare parts inventory in the region, your Washtech M2 will not let you down.

### Standard Features

- Autostart on hood closure
- 1, 2 and 3 minute cycles
- Capacity of up to 1,080 plates / 1,500 glasses per hour
- Compatible with 500mm racks
- Low water consumption of 2.4 litres per cycle
- Heavy-duty stainless steel construction and wash manifold
- Reliable double filtration system via scrap trays and separate wash inlet filter
- Advanced electronic controls
- Soft start wash cycle
- Easy installation with:
  - Water supply hose
  - Detergent and rinse aid pumps with injector lines
  - Drain pump with outlet hose
- Self-cleaning cycle
- EcoPower - reduced temperatures and energy consumption when machine is idle
- Watermark approved backflow prevention
- Moffat's comprehensive 5-2-1 Warranty

### Includes:

- 2 x 500mm dish rack (600 70028)
- 1 x 500mm cup rack (600 70029)
- 2 x cutlery container (C660503)



## M2



moffat.com.au  
washtech.com.au

**Moffat Pty Limited**

### VIC/TAS/SA

70 Springvale Road  
Mulgrave, Victoria 3170  
Telephone 03-9518 3888  
Fax 03-9518 3833  
vsales@moffat.com.au

### NSW

Telephone 02-8833 4111  
nswsales@moffat.com.au

### QLD


Telephone 07-3630 8600  
qldsales@moffat.com.au

### WA


Telephone 08-9413 2400  
wasales@moffat.com.au

In line with policy to continually develop and improve its products, Washtech reserves the right to change specifications and design without notice.

© Copyright Moffat Ltd  
Version: WM20020 2101

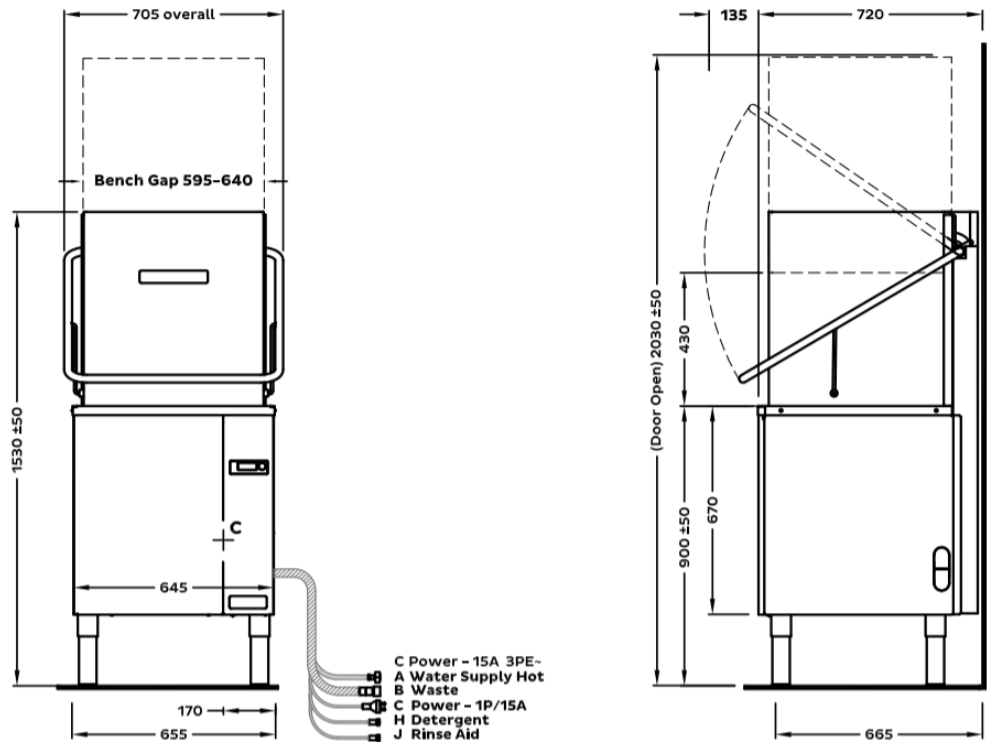

**Bench detail**

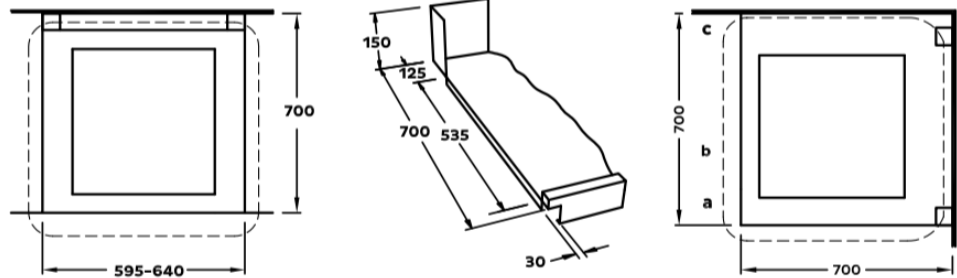

### A - Hot Water\*

Temperature 65°C  
Connection 3/4" male; hose supplied  
Pressure 100-350kPa  
Flow 10 litres per min  
Quality Potable - refer table  
Backflow Prevention AVB  
Consumption 2.4 litres per cycle\*

### B - Waste - Pumped Drain

Connection Hose supplied for open standpipe  
750 high or connection to sink trap

C - Electrical	V	Hz	A/phase	Max kW
Single Phase	240	50	15	3.75
Three Phase	415	50	15	9.75

### Dimensions

	Machine	Packed
Width (mm)	705	760
Depth (mm)	720	830
Height (mm)	1530	1450
Weight (kg)	94	125
Volume (m <sup>3</sup> )		0.91

### Water Quality

	Min	Max
pH	7	8
Hardness (ppm)	20	100
Cl <sup>-</sup>		100
SO <sub>4</sub>		400
Fe		0.1
Mn		0.5
Cu		0.05
Cl <sub>2</sub>		0.1

### Corner Installation Notes

- Machine must face left for easy access to controls
- Allow 300 clearance to front for service access
- Splashback return must be no higher than 150

Isolating switch must be within 1m of, and not directly behind the machine.

\* Suitable for connection to cold inlet water. For optimal productivity, use hot inlet water.

Refer to operator manual for installation instructions.



an Ali Group Company

