


## PW3C

Widebody Passthrough Warewasher with Heat Recovery  
**W 1330mm x D 920mm x H 2015mm**

Wash Chamber  
W 1050mm  
D 640mm  
H 650mm



Washtech warewashers are built to improve the efficiency of operations washing oversized and/or heavily soiled items, from bakeries to production kitchens, supermarkets to hospitals. This is achieved with a continuous and consistent wash process throughout the day that is easy on your staff. With highly efficient water consumption rates, they are also light on the environment and operating costs.

The PW3C is a powerful, highly durable, simple-to-use and easy-to-maintain passthrough warewasher. It features Washtech hybrid controls which combine IP67 stainless switches, tried-and-tested switchgear, with a customisable electronic timer. Built with a large wash chamber and counterbalanced passthrough door, the PW3C is ideal for washing bins, crates, bowls and other oversized items. The PW3C also features a highly efficient heat recovery unit which ensures minimal energy consumption and steam emissions, for even lower operating costs and an improved working environment.

Since 1981 Washtech dishwashers have been constructed from heavy-duty stainless steel, and are engineered specifically for Australian conditions and regulations. Backed by the most extensive service network and spare parts inventory in the region, your Washtech PW3C will not let you down.

### Special Features

- Suitable for installation without an extraction canopy in many situations
- Integrated heat recovery unit reduces steam emissions and energy consumption and optimises for fast, efficient operation on cold inlet water

### Standard Features

- Versatile 3, 5 and 7 minute wash cycles
- Large internal wash chamber with useable area of W 1050mm x D 640mm x H 650mm
- Low water consumption of 4.0 litres per cycle
- Washtech hybrid controls
- Easy installation supplied with:
  - Water supply hose
  - Detergent and rinse aid pumps with injector lines
- High powered dual-pump wash system
- Suitable for connection to low inlet water pressure (break tank and rinse pump fitted)
- Heavy-duty stainless steel construction and wash manifold
- Robust stainless steel wash and rinse arms with precision stainless steel jets
- Dual stage heavy-duty stainless steel filtration system including dual scrap trays and separate wash inlet filter
- Wash chamber easily accessible via counter-sprung hood
- Easy loading with inline bench work
- Watermark approved backflow prevention
- Moffat's comprehensive 5-2-1 Warranty

### Includes:

- 1 x 500mm dish rack (600 70028)
- 1 x 500mm cup rack (600 70029)
- 1 x 435mm cup cover (K0452)
- 1 x cutlery basket (C660508)



## PW3C

**MOFFAT®**

moffat.com.au  
washtech.com.au

**Moffat Pty Limited**

**VIC/TAS/SA**

70 Springvale Road  
Mulgrave, Victoria 3170  
Telephone 03-9518 3888  
Fax 03-9518 3833  
vsales@moffat.com.au

**NSW**

Telephone 02-8833 4111  
nswsales@moffat.com.au

**QLD**


Telephone 07-3630 8600  
qldsales@moffat.com.au

**WA**

Telephone 08-9413 2400  
wasales@moffat.com.au

In line with policy to continually develop and improve its products, Washtech reserves the right to change specifications and design without notice.

© Copyright Moffat Ltd  
Version: WPW300212'03

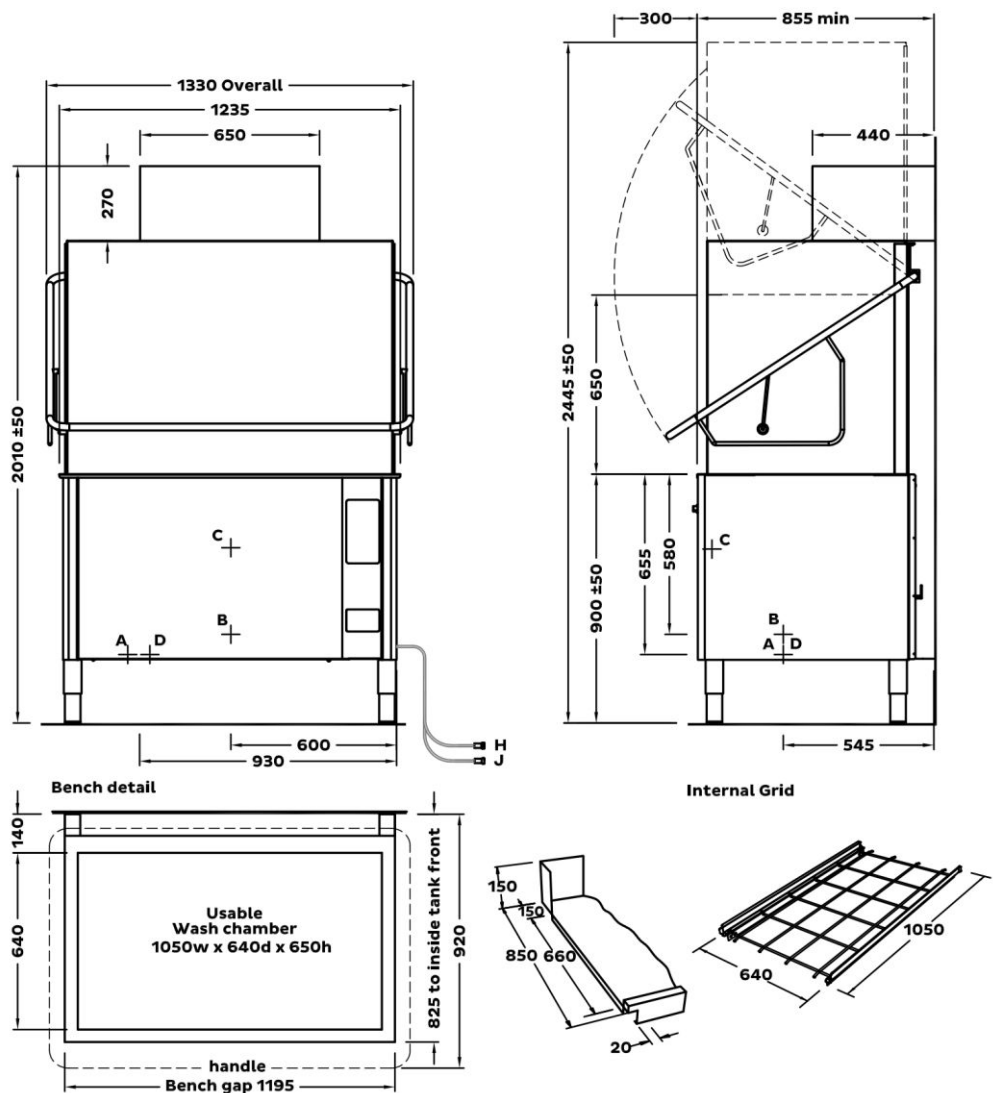

### D - Cold Water

Temperature <25°C  
Connection 3/4" male; hose supplied  
Pressure 100-350kPa  
Flow 10 litres per min  
Quality Potable - refer table  
Backflow Prevention AVB  
Consumption 4.0 litres per cycle

### A - Hot Water (fill only)\*

Temperature 65°C  
Connection 3/4" male; hose supplied  
Pressure 100-350kPa  
Flow 10 litres per min  
Quality Potable - refer table  
Backflow Prevention AVB

### B - Waste

Connection 1.5" BSP male  
Line 2.0" / 50mm minimum

### C - Electrical

V	Hz	A/phase	Max kW
400	50	30	19.50
400	50	20	12.00

### Dimensions

Dimensions	Machine	Packed
Width (mm)	1305	1450
Depth (mm)	920	1100
Height (mm)	2015	2055
Weight (kg)	255	305
Volume (m <sup>3</sup> )		3.03

### Water Quality

Water Quality	Min	Max
pH	7	8
Hardness (ppm)	20	100
Cl <sup>-</sup>		100
SO <sub>4</sub>		400
Fe		0.1
Mn		0.5
Cu		0.05
Cl <sub>2</sub>		0.1

\* Hot water recommended for faster initial heating, can be substituted for additional cold water line.

Suitable for installation without extraction canopy in most instances. Full certification from SEED available on request.

Isolating switch must be within 1m of, and not directly behind the machine.

Refer to operator manual for installation instructions.