

## UL

### Premium Undercounter Dishwasher/Glasswasher – 500mm rack W 600mm x D 635mm x H 845mm

The Washtech UL is a premium undercounter dishwasher and glasswasher that features our most advanced technologies, including our assured rinse and advanced filtration systems, alongside premium touches such as a soft close door as well as full thermal and acoustic installation to provide an optimal working environment around the machine. The UL's intuitive electronic controls provide Soft Start, EcoPower, custom cycles, chemical adjustability and immediate fault diagnosis. Capable of washing 1,500 glasses or 1,080 plates per hour, the UL is a perfect machine for busy cafes, bars, childcare centres or office kitchens.

This versatile and highly efficient dishwasher combines the latest technology with heavy duty stainless steel construction and components. With economical water consumption rates and powerful rinse heating, the UL provides excellent wash results while being light on operating costs and the environment. The UL is also an ideal machine for a high capacity polish-free glasswashing station.

Since 1981 Washtech dishwashers have been constructed from heavy-duty stainless steel, and are engineered specifically for Australian conditions and regulations. Backed by the most extensive service network and spare parts inventory in the region, your Washtech UL will not let you down.

#### Special Features

- Polish-free glasswashing compatible
- Assured rinse – fitted with break tank and rinse pump for optimal sanitising rinse results even when running on cold and/or low pressure inlet water
- Full thermal and acoustic insulation
- Soft close door
- Hands-free AutoDrain

#### Standard Features

- 1, 2 and 3 minute cycles
- Capacity of up to 1,080 plates / 1,500 glasses per hour
- Low water consumption of 2.4 litres per cycle
- Compatible with 500mm racks
- Heavy-duty stainless steel construction
- Heavy-duty stainless steel componentry including heavy duty scrap tray
- Advanced electronic controls
- Soft start wash cycle
- Quick connection including:
  - Water supply hose
  - Detergent and rinse aid pumps with injector lines
  - Drain pump with outlet hose
  - 15 amp plugset
- EcoPower – reduced temperatures and energy consumption when machine is idle
- Watermark approved backflow prevention
- Moffat's comprehensive 5-2-1 Warranty

#### Includes:

- 1 x 500mm dish rack (600 70028)
- 1 x 500mm cup rack (600 70029)
- 1 x cutlery container (C660503)



# UL

## MOFFAT

moffat.com.au  
washtech.com.au

### Moffat Pty Limited

#### VIC/TAS/SA

70 Springvale Road  
Mulgrave, Victoria 3170  
Telephone 03-9518 3888  
Fax 03-9518 3833  
vsales@moffat.com.au

#### NSW

Telephone 02-8833 4111  
nswsales@moffat.com.au

#### QLD


Telephone 07-3630 8600  
qldsales@moffat.com.au

#### WA

Telephone 08-9413 2400  
wasales@moffat.com.au

In line with policy to continually develop and improve its products, Washtech reserves the right to change specifications and design without notice.

© Copyright Moffat Ltd  
Version: WUL0021 2101

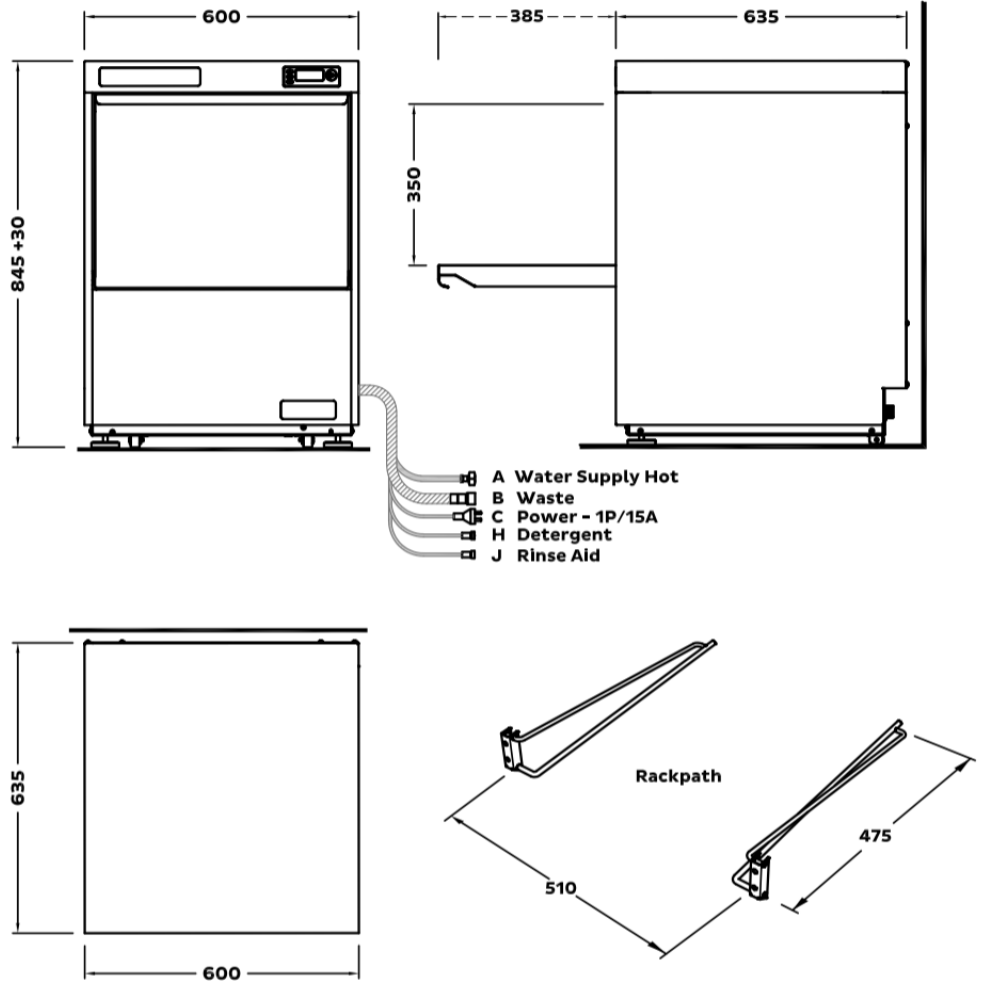

### A - Hot Water\*

Temperature 65°C  
Connection 3/4" male; hose supplied  
Pressure 100-350kPa  
Flow 10 litres per min  
Quality Potable - refer table  
Backflow Prevention AVB  
Consumption 2.4 litres per cycle

### B - Waste - Pumped Drain

Connection Hose supplied for 38mm open standpipe 750mm high or connection to sink trap

C - Electrical	V	Hz	A/phase	Max kW
Single Phase	240	50	15	3.37
Single Phase	240	50	25	6.37
Three Phase	415	50	15	9.00

### Dimensions

Dimensions	Machine	Packed
Width (mm)	600	720
Depth (mm)	635	690
Height (mm)	845	970
Weight (kg)	74	92
Volume (m <sup>3</sup> )		0.48

### Water Quality

Water Quality	Min	Max
pH	7	8
Hardness (ppm)	20	100
Cl <sup>-</sup>		100
SO <sub>4</sub>		400
Fe		0.1
Mn		0.5
Cu		0.05
Cl <sub>2</sub>		0.1

Isolating switch must be within 1m of, and not directly behind the machine.

\* Suitable for connection to cold inlet water. To optimize productivity when operating on cold water connect to 1p/25A or 3p/15A.

Refer to operator manual for installation instructions.