20DSERIES



E27D2

Technical data sheet for

E27D2 ON THE SK2731N / SK2731U STAND

Full Size Digital / Electric Convection Oven on a Stainless Steel Stand





F27D2

Unit shall be a Moffat electrically heated Turbofan convection oven. The oven shall have a one piece vitreous enamel oven chamber, stainless top and sides and safe touch vented easy clean drop down door. Oven shall have capacity for two full size sheet pans. The oven shall have 2.8kW heating elements. The oven shall have a bi-directional single reversing fan system and feature a single halogen oven lamp. The oven shall be controlled by an electronic control having separate digital displays and adjusting knobs for time and temperature functions. The oven control shall allow both manual and programmed operating modes with programmable steam injection and 3 stage cooking. Oven shall be able to be bench mounted on 76mm feet or mounted on oven stand models SK2731N or SK2731U. Oven shall be fitted with a 15A plug-in cordset. Unit shall be supplied in 100% recyclable shipping packaging.

SK2731N

Unit shall be a Moffat Turbofan stainless steel oven stand. The stand shall be constructed from stainless steel tube with castors, with front castors having dual swivel and wheel locks. It shall be fitted with 6 tray runners suitable for up to 600×400 trays and GN 1/1 pans. The stand shall be fully compatible with, and support, Turbofan Convection Oven models E27, E28, and E31. Unit shall be supplied in 100% recyclable shipping packaging.

SK2731U

Unit shall be a Moffat Turbofan stainless steel oven stand. The stand shall be constructed from stainless steel tube with castors, with front castors having dual swivel and wheel locks. It shall be fitted with 6 tray runners suitable for up to 12 half size sheet pans or 6 full size sheet pans. The stand shall be fully compatible with, and support, Turbofan Convection Oven models E27, E28, and E31. Unit shall be supplied in 100% recyclable shipping packaging.

STANDARD FEATURES

- 2 460mm x 660mm / 18" x 26" full size sheet pan capacity
- 2 400mm x 600mm tray capacity
- 115mm tray spacing
- Compact 810mm width
- Digital display Time and Temperature controls
- Large easy view ¾" / 20mm high displays
- Electronic thermostat control
- Electronic timer
- Manual mode and Program mode
- 20 programs with 3 stage cooking and stage end alarms
- Steam injection mode and manual injection
- Bi-directional reversing fan system
- 2.8kW heating power
- 15A plug-in cordset fitted
- Vitreous enamel oven chamber
- Plug-in continuous oven door seal
- Safe-Touch vented drop down door
- Stay-Cool door handle
- Heavy-duty door hinges
- Easy clean door glass system
- Dual halogen oven lamps
- Dia. 180mm full stainless steel oven fan
- Anti-skid 50mm dia. 76mm high adjustable stainless steel feet
- 2 oven wire racks supplied
- 100% recyclable packaging

ACCESSORIES

- Turbofan SK2731N Oven Stand suits 400mm x 600mm trays and GN 1/1 pans
- Turbofan SK2731U Oven Stand suits 460mm x 660mm / 18" x 26" pans



20DSERIES

turbofan

E27D2

E27D2 Full Size Digital / Electric Convection Oven on a Stainless Steel Stand

CONSTRUCTION

Vitreous enameled fully welded oven chamber Stainless steel front, sides and top exterior Stainless steel oven fan baffle and oven vent Removable 2 position chrome plated wire side racks

Oven racks chrome plated wire (2 supplied) Stainless steel frame drop down hinged door

5mm thick door outer glass

5mm thick low energy loss door inner glass Heavy-duty counterbalanced door hinges

Wear resistant powder coated welded door handle

Stainless steel control panel

Aluminised coated steel base and rear panels

CONTROLS

Electronic controls with Digital Time and Temperature display, Manual or Program modes

Large 20mm high LED displays

Two individual time and temperature setting control knobs

ON/OFF and Oven Lights key

Timer Start/Stop key

Steam injection key

Programs select key Actual temperature display key

Adjustable buzzer/alarm volume

Thermostat range 50-260°C

Timer range from 180 minutes in countdown mode Timer range up to 999 minutes in time count mode for

holding, slow cooking

Over-temperature safety cut-out

CLEANING

Stainless steel top and sides continuous exterior panel Vitreous enameled oven chamber

Fully removable chrome plated oven side racks

Removable stainless steel oven fan baffle

Full stainless steel oven fan

Easy clean door system with hinge out door inner glass

(no tools required)

Removable plug-in oven door seal (no tools required)

76mm high stainless steel feet for easy access underside

SPECIFICATIONS

Electrical Requirements

230-240V, 50Hz, 1P+N+E, 3kW, 12A

15A cordset fitted

Water Requirements (optional) Cold water connection 3/4" BSP male

80psi maximum inlet pressure / 20psi minimum inlet pressure

External Dimensions

Width 810mm

Height 607mm including 76mm feet

Depth 762mm

Oven Internal Dimensions Width 695mm

Height 305mm 470mm Depth Volume 0.10m3

Oven Rack Dimensions Width 660mm

Depth 460mm Nett Weight (E27D2)

60.2kg

Packing Data (E27D2)

77.8kg 0.55m3

Width 870mm

Height 755mm 835mm Depth

SK2731N / U Stainless Steel Stand

All stainless steel welded frame oven stand for

Turbofan E27, E28 and E31 Series model ovens

6 position tray runners standard

4 76mm diameter wheel swivel castors standard with

2 front castors with dual swivel and wheel lock

Welded 38mm and 32mm square tube front and rear frames Welded rack supports/side frames

Top frame oven supports suit Turbofan E27, E28 and E31

Series oven mounting

Supplied CKD for assembly on site

External Dimensions (SK2731N/U Oven Stand)

Width 810mm Height 880mm Depth 2650mm

Nett Weight (SK2731N/U Oven Stand)

19.5kg

Packing Data (SK2731N/U Oven Stand)

22kg 0.11m3

Width 830mm Height 900mm 152mm Depth


INSTALLATION CLEARANCES

Rear 25mm LH Side 25mm RH Side 25mm

CLEARANCE FROM SOURCES OF HEAT

A minimum distance of 300mm from the appliance sides

is required

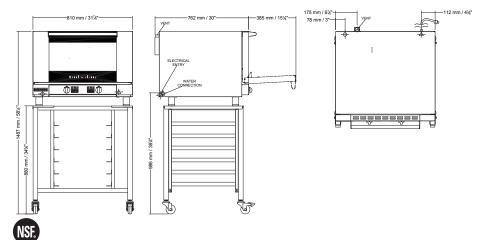



Australia www.moffat.com.au New Zealand www.moffat.co.nz www.turbofanoven.com

Australia Moffat Pty Limited

Victoria/Tasmania 740 Springvale Road Mulgrave, Victoria 3170 Telephone +61 3-9518 3888 Facsimile +61 3-9518 3833 vsales@moffat.com.au

New South Wales Telephone +61 2-8833 4111 nswsales@moffat.com.au

South Australia Telephone +61 3-9518 3888 vsales@moffat.com.au

Queensland Telephone +61 7-3630 8600 qldsales@moffat.com.au

Western Australia Telephone +61 8-9413 2400 wasales@moffat.com.au

New Zealand Moffat Limited

Christchurch 45 Illinois Drive Izone Business Hub Rolleston 7675 Telephone +64 3-983 6600 Facsimile +64 3-983 6660 sales@moffat.co.nz

Auckland Telephone +64 9-574 3150 sales@moffat.co.nz





Designed and manufactured by



ISO9001

All Turbofan products are designed and manufactured by Moffat using the internationally recognised ISO9001 quality management system, covering design, manufacture and final inspection. ensuring consistent high quality at all times.

In line with policy to continually develop and improve its products, Moffat Limited reserves the right to change specifications and design without notice

© Copyright Moffat Ltd AN.TFN.S.1901

an Ali Group Company

