# **20M**SERIES



E27M2

Technical data sheet for

# E27M2 ON THE SK2731U STAND

Full Size Manual / Electric Convection Oven on a Stainless Steel Stand





#### F27M2

Unit shall be a Moffat electrically heated Turbofan convection oven. The oven shall have a one piece vitreous enamel oven chamber, stainless top and sides and safe touch vented easy clean drop down door. Oven shall have capacity for two full size sheet pans. The oven shall have 2.8kW heating elements. The oven shall have a bi-directional single reversing fan system. The oven shall be controlled by a mechanical thermostat with a range of 50-260°C, a 60 minute bake timer, and feature dual halogen oven lamps. Oven shall be able to be bench mounted on 76mm feet or mounted on oven stand models SK2731N or SK2731U. Oven shall be fitted with a 15A plug-in cordset. Unit shall be supplied in 100% recyclable shipping packaging.

#### SK2731N

Unit shall be a Moffat Turbofan stainless steel oven stand. The stand shall be constructed from stainless steel tube with castors, with front castors having dual swivel and wheel locks. It shall be fitted with 6 tray runners suitable for up to  $600 \times 400$  trays and GN 1/1 pans. The stand shall be fully compatible with, and support, Turbofan Convection Oven models E27M2, E27M3, E28M4, and E31D4. Unit shall be supplied in 100% recyclable shipping packaging.

#### SK2731U

Unit shall be a Moffat Turbofan stainless steel oven stand. The stand shall be constructed from stainless steel tube with castors, with front castors having dual swivel and wheel locks. It shall be fitted with 6 tray runners suitable for up to 12 half size sheet pans or 6 full size sheet pans. The stand shall be fully compatible with, and support, Turbofan Convection Oven models E27M2, E27M3, E28M4, and E31D4. Unit shall be supplied in 100% recyclable shipping packaging.

## STANDARD FEATURES

- 2 460mm x 660mm / 18" x 26" full size sheet pan capacity
- 2 400mm x 600mm tray capacity
- 115mm tray spacing
- Compact 810mm width
- Bi-directional reversing fan system
- 2.8kW heating power
- 15A plug-in cordset fitted
- Vitreous enamel oven chamber
- Plug-in continuous oven door seal
- Safe-Touch vented drop down door
- Stay-Cool door handle
- Heavy-duty door hinges
- Easy clean door glass system
- Mechanical thermostat 50-260°C
- 60 minute timer with time up alarm
- Dual halogen oven lamps
- Dia. 180mm full stainless steel oven fan
- Anti-skid 50mm dia. 76mm high adjustable stainless steel feet
- 2 oven wire racks supplied
- 100% recyclable packaging

### ACCESSORIES

- Turbofan SK2731N Oven Stand suits 400mm x 600mm trays and GN 1/1 pans
- Turbofan SK2731U Oven Stand suits 460mm x 660mm / 18" x 26" pans



## **20M**SERIES

# turbofan

E27M2

# **E27M2** Full Size Manual / Electric Convection Oven on a Stainless Steel Stand

#### CONSTRUCTION

Vitreous enameled fully welded oven chamber Stainless steel front, sides and top exterior Stainless steel oven fan baffle and oven vent Removable 2 position chrome plated wire side racks

Oven racks chrome plated wire (2 supplied) Stainless steel frame drop down hinged door 5mm thick door outer glass

5mm thick low energy loss door inner glass

Heavy-duty counterbalanced door hinges Wear resistant powder coated welded door handle

Stainless steel control panel

Aluminised coated steel base and rear panels

#### CONTROLS

Power ON control panel indicator Mechanical thermostat 50-260°C Heating ON control panel indicator Manual 60 minute timer Time-Up control panel indicator and buzzer Over-temperature safety cut-out

#### **CLEANING**

Stainless steel top and sides continuous exterior panel Vitreous enameled oven chamber

Fully removable chrome plated oven side racks

Removable stainless steel oven fan baffle

Full stainless steel oven fan

Easy clean door system with hinge out door inner glass (no tools required)

Removable plug-in oven door seal (no tools required)
76mm high stainless steel feet for easy access underside

#### **SPECIFICATIONS**

Electrical Requirements

230-240V, 50Hz, 1P+N+E, 3kW, 12A

15A cordset fitted External Dimensions Width 810mm

Height 607mm including 76mm feet

Depth 762mm
Oven Internal Dimensions

Width 695mm Height 305mm Depth 470mm Volume 0.10m3 Oven Rack Dimensions Width 660mm Depth 460mm

Nett Weight (E27M2)

60.2kg Packing Data (E27M2)

77.8kg

0.55m3 Width 870mm Height 755mm

Height 755mm Depth 835mm

## SK2731U Stainless Steel Stand

All stainless steel welded frame oven stand for Turbofan E27, E28 and E31 Series model ovens

6 position tray runners standard

4 76mm diameter wheel swivel castors standard with

2 front castors with dual swivel and wheel lock

Welded 38mm and 32mm square tube front and rear frames Welded rack supports/side frames

Top frame oven supports suit Turbofan E27, E28 and E31 Series oven mounting

Supplied CKD for assembly on site

External Dimensions (SK2731U Oven Stand)

Width 810mm Height 880mm Depth 2650mm

Nett Weight (SK2731U Oven Stand)

19.5kg

Packing Data (SK2731U Oven Stand)

22kg

0.11m3

Width 830mm Height 900mm Depth 152mm

## INSTALLATION CLEARANCES

Rear 25mm LH Side 25mm RH Side 25mm

CLEARANCE FROM SOURCES OF HEAT

A minimum distance of 300mm from the appliance sides is

# **MOFFAT**

Australia
www.moffat.com.au
New Zealand
www.moffat.co.nz
www.turbofanoven.com

### Australia Moffat Pty Limited

Victoria/Tasmania 740 Springvale Road Mulgrave, Victoria 3170 Telephone +61 3-9518 3888 Facsimile +61 3-9518 3833 vsales@moffat.com.au

New South Wales Telephone +61 2-8833 4111 nswsales@moffat.com.au

South Australia Telephone +61 3-9518 3888 vsales@moffat.com.au

Queensland Telephone +61 7-3630 8600 qldsales@moffat.com.au

Western Australia Telephone +61 8-9413 2400 wasales@moffat.com.au

#### New Zealand Moffat Limited

Christchurch 45 Illinois Drive Izone Business Hub Rolleston 7675 Telephone +64 3-983 6600 Facsimile +64 3-983 6660 sales@moffat.co.nz

Auckland Telephone +64 9-574 3150 sales@moffat.co.nz





ISO9001 Quality Management SGS Standard

Designed and manufactured by




ISO9001

All Turbofan products are designed and manufactured by Moffat using the internationally recognised ISO9001 quality management system, covering design, manufacture and final inspection, ensuring consistent high quality at all times.

In line with policy to continually develop and improve its products, Moffat Limited reserves the right to change specifications and design without notice.

© Copyright Moffat Ltd AN.TFN.S.1901

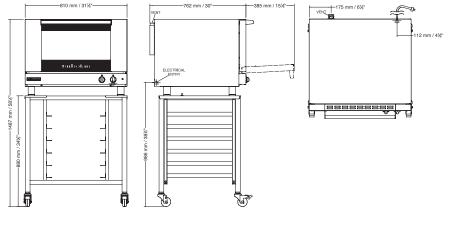



an Ali Group Company

