

## Modular Cooking Range Line EVO900 4 Electric Infrared Cooking Top

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_

**392045 (Z9IREH4000)**

4-zone (3,4 kW each) electric infrared cooking top

**392170 (Z9IREH400N)**

4-zone (3,4 kW each) electric infrared cooking top

### Short Form Specification

Item No. \_\_\_\_\_

Glass ceramic cooking surface 6 mm thick, with 4 concentric circular heating zones. Infrared top surface with seamless transition between individual heating zones. Body and work top of unit entirely in stainless steel with Scotch Brite finish. Extra strength work top in heavy duty 2 mm stainless steel. Right-angled side edges to allow flush-fitting junction between units.

### Main Features

- Ceramic glass top cooking surface with 4 infrared heating zones 6 mm thick.
- The circular concentric heating sections measuring from 180 to 300 mm give uniform heat also to the largest pan.
- The cooking top is sealed to prevent infiltration inside the unit.
- Warning light to indicate residual surface heat.
- Immediate heat transfer from cooking top to pan.
- Low heat dissipation to the kitchen.
- The smooth glass-ceramic surface can be quickly and easily cleaned, thus providing maximum hygiene.
- IPX5 water protection.
- Suitable for countertop installation.

### Construction

- All exterior panels in Stainless Steel with Scotch Brite finishing.
- AISI 304 stainless steel worktop, 2mm thick.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- Unit is 900mm deep to give a larger working surface area.


### Sustainability

- Energy regulation of each zone.

APPROVAL: \_\_\_\_\_

**Optional Accessories**

- Junction sealing kit PNC 206086
- 4 wheels, 2 swivelling with brake PNC 206135   
(EVO700/900). It is mandatory to install  
with base supports for feet/wheels.  
(only for 392045)
- Support for bridge type installation, PNC 206137   
800 mm
- Support for bridge type installation, PNC 206138   
1000 mm
- Support for bridge type installation, PNC 206139   
1200 mm
- Support for bridge type installation, PNC 206140   
1400 mm
- Support for bridge type installation, PNC 206141   
1600 mm
- Side handrail for right/left hand PNC 206165
- Frontal handrail 800 mm PNC 206167
- Large handrail (portioning shelf) 800 PNC 206186   
mm
- Frontal handrail 1200 mm PNC 206191
- Frontal handrail 1600 mm PNC 206192
- Water column with swivel arm (water PNC 206289   
column extension not included)
- Water column extension PNC 206290
- Chimney upstand, 800 mm PNC 206304
- 2 side covering panels, height 250 mm, PNC 206321   
depth 900 mm

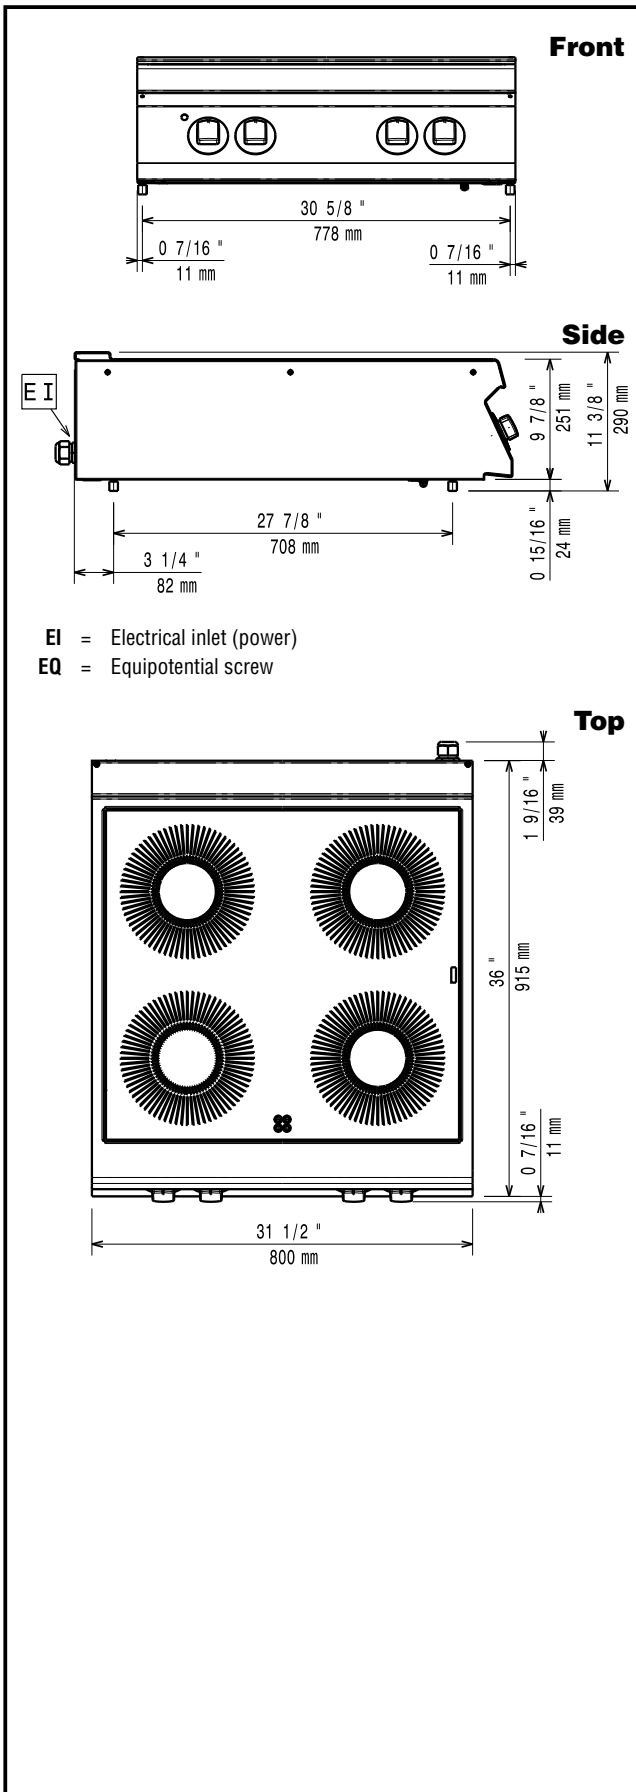

**Electric**

<b>Supply voltage:</b>	
<b>392045 (Z9IREH4000)</b>	380-400 V/3N ph/50/60 Hz
<b>392170 (Z9IREH400N)</b>	230 V/3 ph/50/60 Hz
<b>Total Watts:</b>	13.6 kW
<b>Predisposed for:</b>	
<b>392045 (Z9IREH4000)</b>	380-400V 3N~ 50/60Hz 12-13,6kW

**Key Information:**

<b>Front Plates Power:</b>	3.4 - 3.4 kW
<b>Back Plates Power:</b>	3.4 - 3.4 kW
<b>Front Plates dimensions:</b>	Ø 300 Ø 300
<b>Back Plates dimensions:</b>	Ø 300 Ø 300
<b>Net weight:</b>	69 kg
<b>Shipping weight:</b>	
<b>392045 (Z9IREH4000)</b>	52 kg
<b>392170 (Z9IREH400N)</b>	89 kg
<b>Shipping height:</b>	
<b>392045 (Z9IREH4000)</b>	530 mm
<b>392170 (Z9IREH400N)</b>	540 mm
<b>Shipping width:</b>	
<b>392045 (Z9IREH4000)</b>	1010 mm
<b>392170 (Z9IREH400N)</b>	1020 mm
<b>Shipping depth:</b>	
<b>392045 (Z9IREH4000)</b>	860 mm
<b>392170 (Z9IREH400N)</b>	900 mm
<b>Shipping volume:</b>	
<b>392045 (Z9IREH4000)</b>	0.46 m <sup>3</sup>
<b>392170 (Z9IREH400N)</b>	0.5 m <sup>3</sup>
<b>Certification group:</b>	
<b>392045 (Z9IREH4000)</b>	N9CIE
<b>392170 (Z9IREH400N)</b>	NIR98

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.