

MA005A Brema CB425A-HCO-DP Specification Sheet Issue 005 | Issue Date: 11/01/2023




B-Qube

CB425A-HCQ-DP



Self-contained ice maker - Sprayer system Daily production up to 54 kg

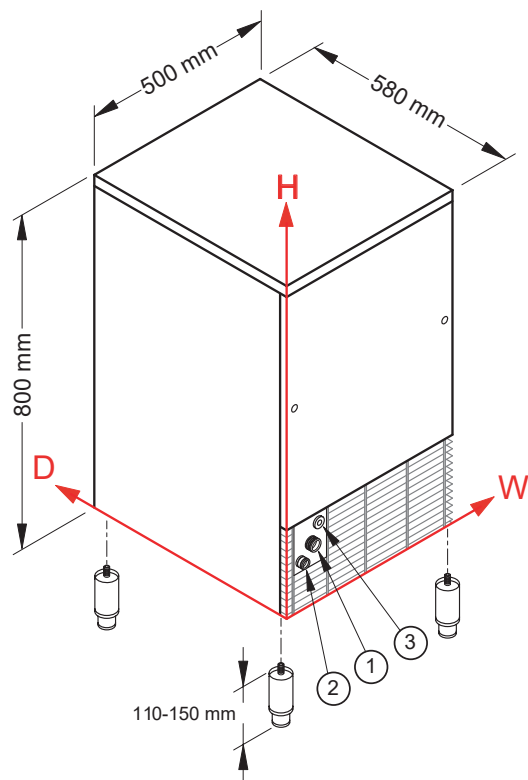

► Working conditions

- Location: **Indoor**

	Min	Max
Ambient temperature	+10°C	+43°C
Water temperature	+3°C	+32°C
Voltage	-10%	+10%
Water inlet pressure	1bar (14 psi)	6bar (84 psi)

► Connections

All measures are referred to the rear bottom-left corner (W-H-Ø)

- ① Water in.: 111mm - 196mm - 3/4" ② Water out.: 49mm - 151mm - 24mm - 3/4" ③ Electrical connections.: 156mm - 232mm
④ Cond. water in.: 119mm - 181mm - 3/4" ④ Only for water cooling systems

► Technical Information

Production in 24h	48kg
Store capacity, up to	25kg
Cooling system	A
Kind of cube	Q-23g
Refrigerant	R290
Standard voltage	240V - 50 Hz - 10A (lead with plug supplied)

Finish	AISI 304 stainless steel, scotch brite
Clearance	100mm sides + back
Water consumption	A: 3 l/kg
Sizes (W-D-H)	497 - 592 - 797
Sizes with pack (W-D-H)	550 - 660 - 970
Net weight	46kg
Gross weight	54kg
Power consumption*	450W
Electrical consumption	18 kWh/100kg

All the technical information need to be considered at the following conditions:
Sizes without feet
Standard Cube (23 g)
Ambient temperature +21°C
Water temperature +15°C
Electrical consumption at +32°C (standard voltage)
*Average power consumption at +43°C (standard voltage)

Models and specifications are subject to change without notice



www.comcater.com.au



contactus@comcater.com.au