

ICE0325 - Cube Ice Maker



Ice Form



| FULL CUBE DIMENSIONS |              |
|----------------------|--------------|
| W x D x H (mm)       | 22 x 22 x 22 |
| HALF CUBE DIMENSIONS |              |
| W x D x H (mm)       | 10 x 22 x 22 |

Features

- Narrow Profile
- Space-saving 567mm wide design.
- Produces up to 137kg of ice per day.
- Harvest Assist provides consistent ice production for the life of the ice maker while reducing energy consumption and increasing capacity.
- Pure Ice® exclusively by Ice-O-Matic. Built-in antimicrobial protection for the life of the ice maker inhibits bacteria growth on ice maker surfaces. Coast's optional water filtration system provides protection against unpleasant tastes, odours and scale formation.
- Durable, electroless nickel plating on all evaporator plates ensures reliability.
- Constructed from corrosion-resistant stainless steel and fingerprint-proof plastic.
- Made in U.S.A

**Warranty: 3 years parts and labour, and 5 years parts coverage on evaporator and compressor.**

Options & Accessories

| Recommended Water Filter |             |
|--------------------------|-------------|
| System                   | Replacement |
| CD10                     | CD100       |





## ICE0325 - Cube Ice Maker

### Air Cooled

Please note: air-cooled units require 152 mm clearance for air intake and exhaust.

- A. Ice maker potable water in, 3/8" FPT.
- B. Ice maker water out, 3/4" FPT.
- C. Hole for electrical connections, 7/8".

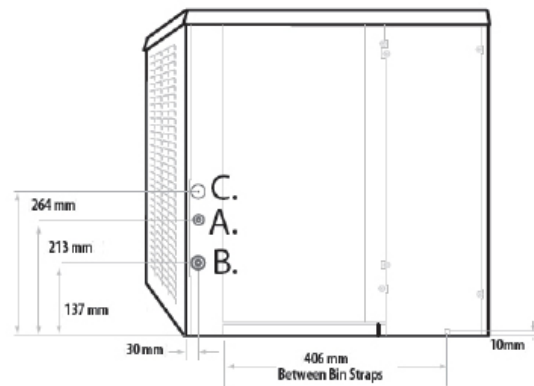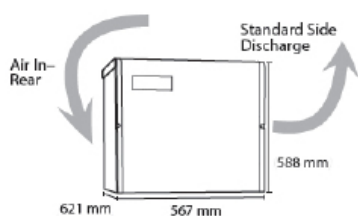

### Dimensions

| Model ICE0325  |                 |
|----------------|-----------------|
| W x D x H (mm) | 567 x 621 x 588 |

### Operating Requirements

|                         | Minimum | Maximum (50Hz) |
|-------------------------|---------|----------------|
| Ambient Temp. Range Air | 10°C    | 43°C           |
| Water Temp.             | 4.4°C   |                |
| Water Pressure          | 1.4 BAR | 4.1 BAR        |

### Specifications

| Model   | Cond. Unit | Ice Production                     |                                    | Water Usage                                    | kWH Used                                 | Watts Used                     | Voltage Characteristics | Min. Circuit Ampacity | Fuse Size | Approx. BTUs |
|---------|------------|------------------------------------|------------------------------------|--|--|--------------------------------|-------------------------|-----------------------|-----------|--------------|
|         |            | Per 24 hrs @ 21°C air / 10°C water | Per 24 hrs @ 32°C air / 21°C water | Litres per 45kg of ice @ 32°C air / 21°C water | Per 45 kg of ice @ 32°C air / 21°C water | Per Hr @ 32°C air / 21°C water |                         |                       |           | Per hr       |
| ICE0325 | Air        | 137kg                              | 97kg                               | 107  | 7.2                                      | 640                            | 220-240/50/1            | 6.6                   | 16        | 4,990        |

### Bin Chart Kits for Combining Wider Bins with Smaller Models

| Model   | B25<br>110kg capacity<br>762mm width | B40<br>156kg capacity<br>762mm width | B42<br>160kg capacity<br>559mm width | B55<br>232kg capacity<br>762mm width | B100<br>388kg capacity<br>1219mm width | CD40522<br>55kg capacity<br>559mm width |
|---------|--------------------------------------|--------------------------------------|--------------------------------------|--------------------------------------|--|---|
| ICE0325 | Bin Adapter required                 |                                      | Kit not required                     | Bin Adapter required                 | N/A                                    | N/A                                     |

#### Notes

- Number of wires: 3 (including ground)
- Approx. Shipping Weight: 68kg
- R404A

