



EICEU225 - Self Contained Cube Ice Maker



FULL CUBE DIMENSIONSW x D x H (mm)22 x 22 x 22HALF CUBE DIMENSIONSW x D x H (mm)10 x 22 x 22

CUBE

Ice Form

Features

- Space-saving 623mm wide undercounter design.
- Produces up to 96kg of ice per day.
- Harvest Assist provides consistent ice production for the life of the ice maker while reducing energy consumption and increasing capacity.
- Pure Ice® exclusively by Ice-O-Matic. Built-in antimicrobial protection for the life of the ice maker inhibits bacteria growth on ice maker surfaces. Coast's optional water filtration system provides protection against unpleasant tastes, odours and scale formation.
- Durable, electroless nickel plating on all evaporator plates ensures reliability.
- Constructed from corrosion-resistant stainless steel and fingerprint-proof plastic.
- Made in U.S.A

Warranty: 3 years parts and labour, and 5 years parts coverage on evaporator and compressor.

Space-Saving Solutions

- Front air discharge design for compact spaces.
- Low profile top saves counter space.
- Stores up to 32kg of ice.
- Easy front access to ice.



SYDNEY OFFICE 46 Box Road Taren Point NSW 2229 Ph: (02) 9524 1234 Fax: (02) 9524 0968

Options & Accessories

System

CD10

Replacement

CD100

Coast Distributors Pty Ltd ABN 86 002 020 162 www.coastdistributors.com.au November 2015 MELBOURNE OFFICE 25/44 Mahoneys Road Thomastown VIC 3074 Ph: (03) 9460 1095 Fax: (03) 94601357





CEU225 - Self Contained Cube Ice Maker


Air Cooled

- A. Ice maker water in 3/8" FPT.
- B. Bin and ice maker drain, 3/4" FPT.
- C. Hole for electrical connections, 7/8" (Cord on 115V).
- D. Condenser water in, 3/8" FPT (water cooled units only).
- E. Condenser water out, 1/2" FPT (water cooled units only).



Dimensions

 $W \times D \times H (mm)$

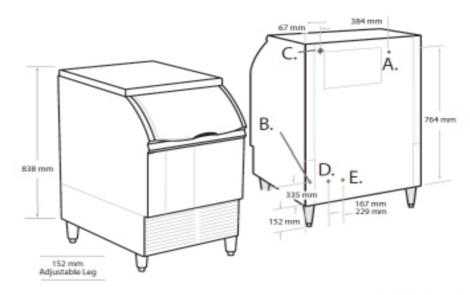

Front & Rear View

Operating Requirements

	Minimum	Maximum (50Hz)
Ambient Temp. Range Air	10°C	43°C
Water Temp.	4.4°C	
Water Pressure	1.4 BAR	4.1 BAR

Specifications

Model	Cond.	Ice Production		Water Usage	kWH Used	Watts Used	Voltage	Min.	Fuse	Approx. BTUs
	Unit	Per 24 hrs @ 21°C air / 10°C water	Per 24 hrs @ 32°C air / 21°C water	Litres per 45kg of ice @ 32°C air / 21°C water	Per 45 kg of ice @ 32°C air / 21°C water	Per Hr @ 32°C air / 21°C water	Characteristics	Circuit Ampacity	Size	Per hr
ICEU22	5 Air	96kg	65kg	124	8.80	520	220-240/50/1	4.9	16	3,774

Notes

• Number of wires: 3 (including ground)

623 x 667 x 991

- Approx. Shipping Weight: 73kg
- R404A

SYDNEY OFFICE 46 Box Road Taren Point NSW 2229 Ph: (02) 9524 1234 Fax: (02) 9524 0968 Coast Distributors Pty Ltd ABN 86 002 020 162 www.coastdistributors.com.au November 2015 MELBOURNE OFFICE 25/44 Mahoneys Road Thomastown VIC 3074 Ph: (03) 9460 1095 Fax: (03) 94601357

agion