
Electrolux PROFESSIONAL

Modular Cooking Range Line 900XP 1200mm Electric Fry Top HP, Smooth scratch resistant chromium Plate

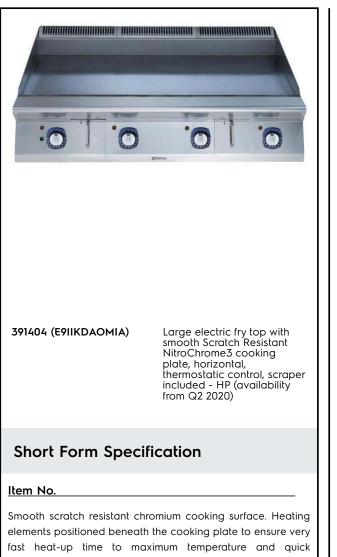

elements positioned beneath the cooking plate to ensure very fast heat-up time to maximum temperature and quick temperature recovery. High precision thermostatic control. To be installed on open base installations, bridging supports or cantilever systems. Removable drawers below the cooking surface for the collection of grease and fat. Body and work top of unit entirely in stainless steel with Scotch Brite finish. Extra strength work top in heavy duty 2 mm stainless steel. Rightangled side edges to allow flush-fitting junction between units.

APPROVAL:

ITEM #		
MODEL #		
NAME #		
SIS #		
AIA #		

Main Features

- Exclusive IcyHot installation: combine the Fry Top HP with the dual temperature refrigerated/freezer base HP and obtain a single appliance which simultaneously increases productivity and facilitates cooking and storage operations.
- Unit to be mounted on open base cupboards, bridging supports or cantilever systems.
- Infrared heating elements mounted below the cooking surface.
- Safety thermostat and thermostatic control.
- Two large drain holes on cooking surface permits the draining of fat into two separate 3 liter collectors placed under the cooking surface.
- Stainless steel high splash guards on the rear and sides of cooking surface.
- The special design of the control knob system guarantees against water infiltration.
- IPX5 water protection.
- Units have 4 independent controls to regulate temperature of the cooking surface.
- Scratch resistant cooking surface thanks to a special treatment of the chromium plate.
- Easy to clean and corrosion resistant chromium surface.
- Temperature range from 120° up to 280°C.

Construction

- Cooking surface completely smooth.
- All exterior panels in Stainless Steel with Scotch Brite finishing.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- Unit is 930 mm deep to give a larger working surface area.
- AISI 304 stainless steel worktop, 2mm thick.
- Non-scratch cooking surface 20mm thick for optimum grilling results and ease of use.

Included Accessories

1 of Scraper for smooth plate fry PNC 164255 tops

Optional Accessories

- Scraper for smooth plate fry tops PNC 164255
- Junction sealing kit
 Support for bridge type installation, PNC 206139
- Support for bridge type installation, PNC 206140 1400mm
- Support for bridge type installation, PNC 206141 1600mm
- Frontal kicking strip, 1200mm (not for PNC 206178 refr-freezer base)
- Back handrail 1200mm, Marine PNC 206309 🗆

Electrolux

900XP 1200mm Electric Fry Top HP, Smooth scratch resistant chromiu Modular Cooking Range





Modular Cooking Range Line 900XP 1200mm Electric Fry Top HP, Smooth scratch resistant chromium Plate

Water drain for fry tops HP	PNC 206345
• Grease/oil kit container for 700 line frytops (half and module) and 900 line frytops (module)	PNC 206346 🗅
 Side handrail-right/left hand (900XP) 	PNC 216044
• Frontal handrail, 1200mm	PNC 216049
 Frontal handrail, 1600mm 	PNC 216050



2020.11.19




Modular Cooking Range Line 900XP 1200mm Electric Fry Top HP, Smooth scratch resistant chromium Plate



	CIECUIC	
	Supply voltage: 391404 (E911KDAOMIA) Total Watts: Predisposed for:	380-400 V/3 ph/50/60 Hz 20 kW 380-400V 3~ 50/60Hz 18-20kW
	Key Information:	
	Configuration: Cooking surface width: Cooking surface depth: External dimensions, Width: External dimensions, Height: External dimensions, Depth: Net weight: Shipping weight:	Top 1194 mm 610 mm 1200 mm 250 mm 930 mm 150 kg 190 kg
	Shipping height:	580 mm
	Shipping width:	1010 mm
	Shipping depth:	1260 mm
	Shipping volume:	0.74 m³
If appliance is set up or peyt to or against temperate		

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.

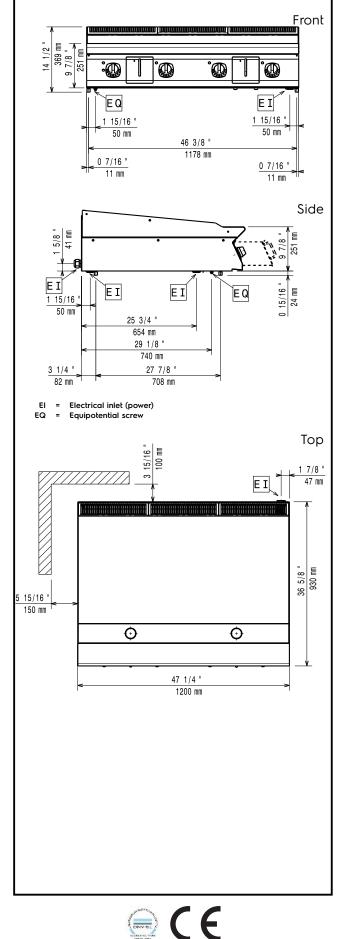

Modular Cooking Range Line 900XP 1200mm Electric Fry Top HP, Smooth scratch resistant chromium Plate The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.